
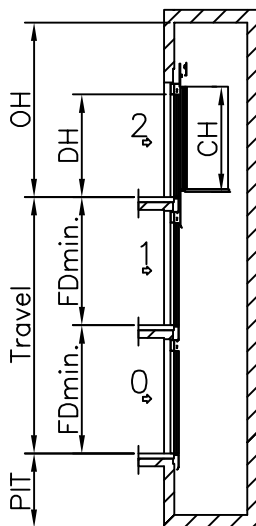


# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

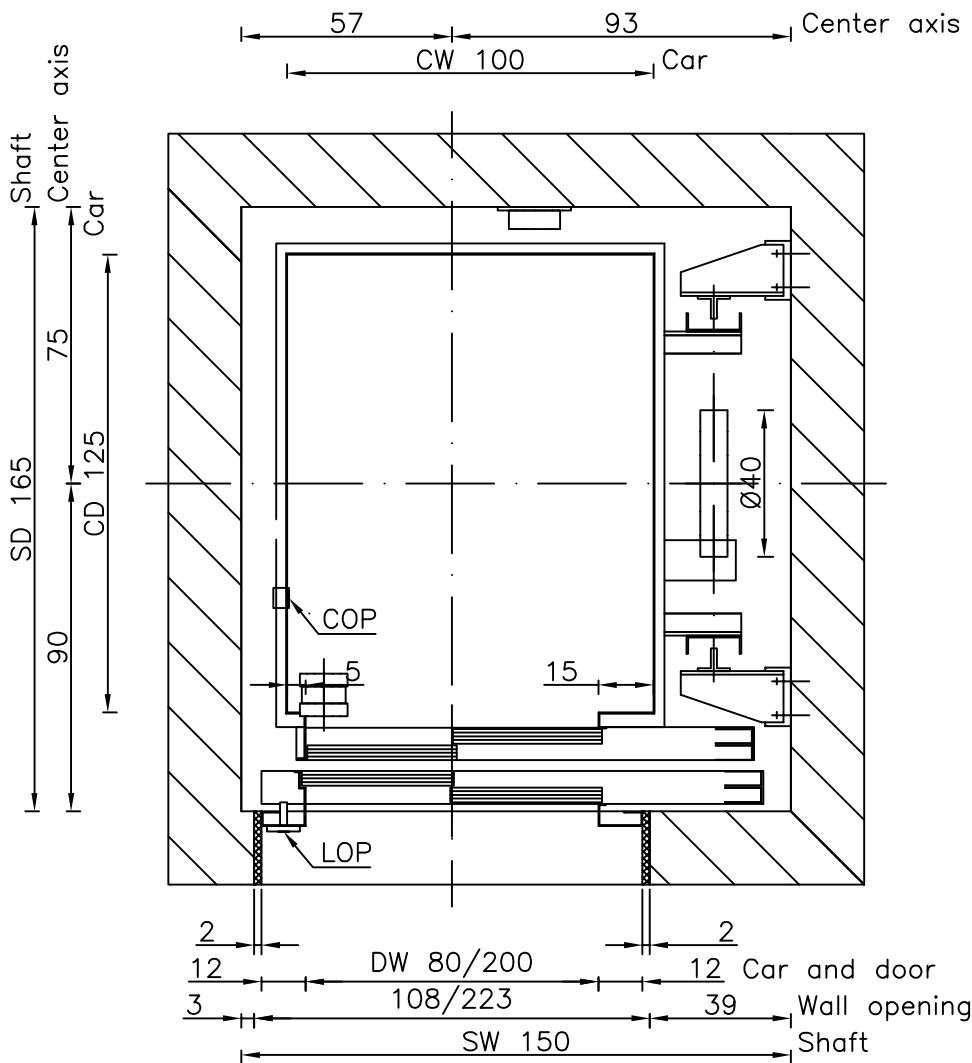

### HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

### HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension: 150 x 165

Speed: 0,6 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 100 cm	DW: 80 cm
CD: 125 cm	DH: 200 cm
CH: 210 cm	
FDmin.: 250 (CH+500 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	10 kW
Running current	21 A
Starting current	28 A
Overload current	36,4A

Dimensions in cm.

Type:	INDIRECT 480 kg TR8		Drawn By: Tomi Irgolič Date: 19.10.2006	
	HYDRAULIC	A4 1:20	Revision: 00	