



# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

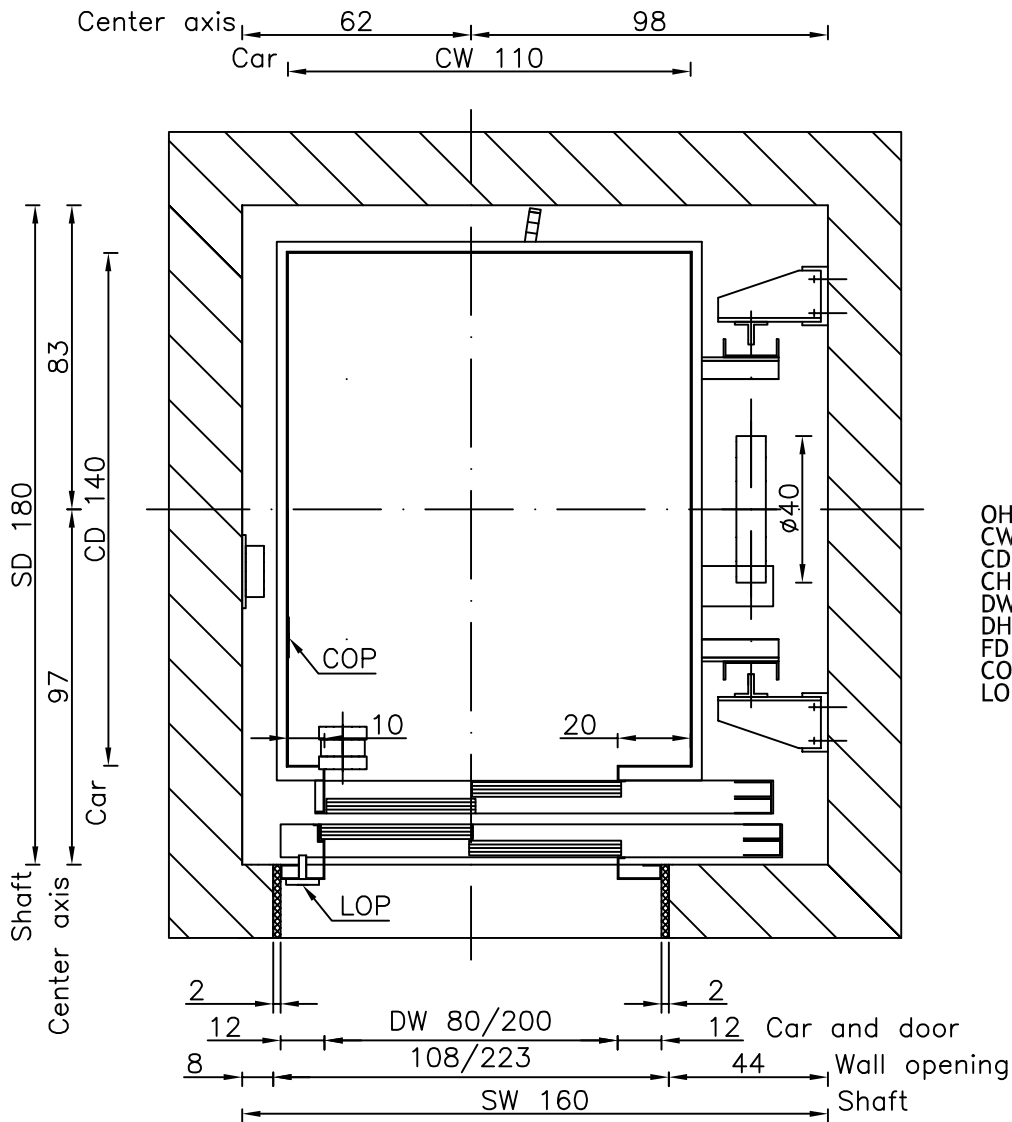

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 FD = Floor distance  
 COP = Car Operating Panel  
 LOP = Landing Operating Panel

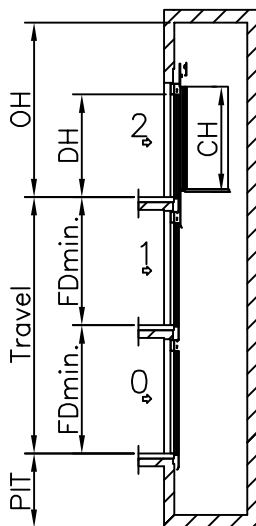

## HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

## HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension: 160 x 180

Speed: 0,6 m/s  
 PIT: 120 cm  
 OH: 320 cm

CW: 110 cm    DW: 80 cm  
 CD: 140 cm    DH: 200 cm  
 CH: 210 cm  
 FDmin.: 250 (CH+50 cm)

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	12 kW
Running current	26,5 A
Starting current	36 A
Overload current	46,8A

Dimensions in cm.

Type:	INDIRECT 630 kg TR8		Drawn By: Tomi Irgolič Date: 19.10.2006	SEC
	HYDRAULIC	A4 1:20	Revision: 00	
			Page: 08	