



Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

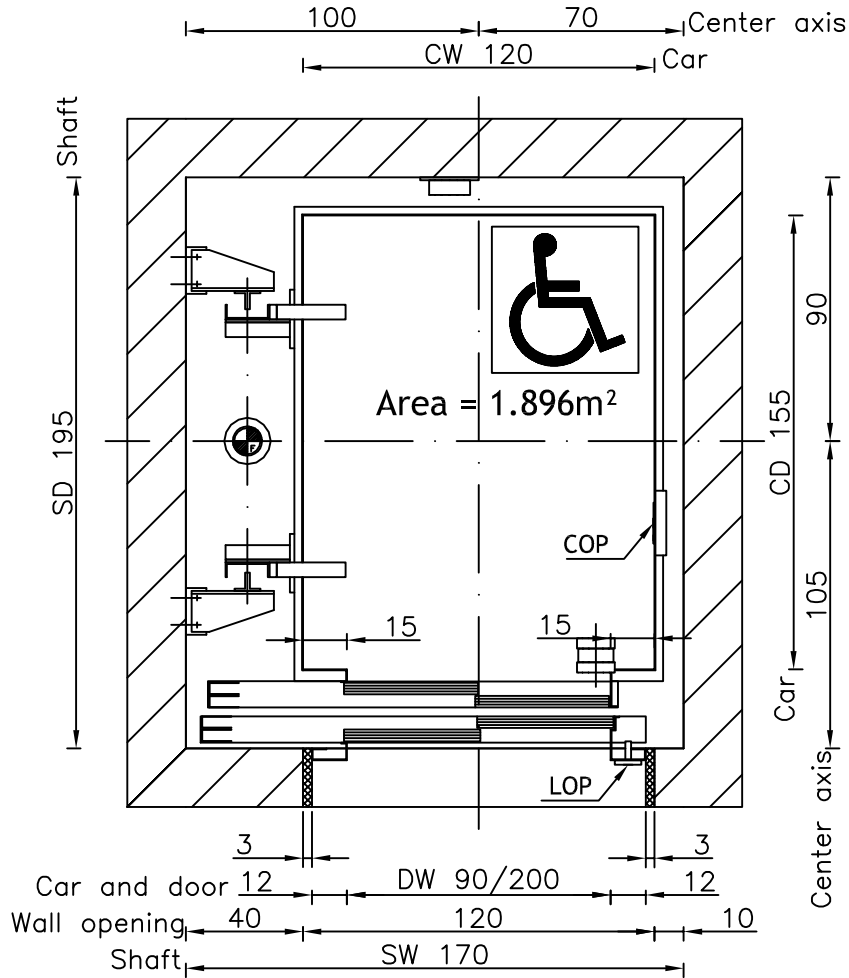

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP= Car Operating Panel
 LOP= Landing Operating Panel

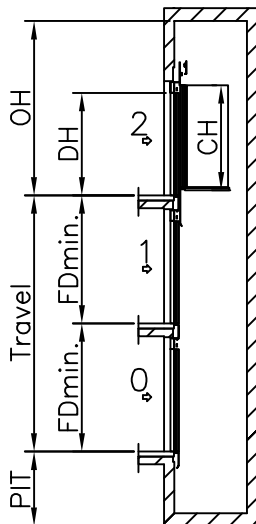

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	18,4kW
Running current	43 A
Starting current	54 A

Speed: 0,6 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 120 cm	DW: 90 cm
CD: 155 cm	DH: 200 cm
CH: 219 cm	
FDmin.: 250 (CH+50 cm)	

Dimensions in cm.

Type:	DIRECT 750 kg TL9	Drawn By: Tomi Irgolič	
		Date: 29.08.2008	
	HYDRAULIC	Revision: 00	Page: 129
		A4	
		1:25	