



# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

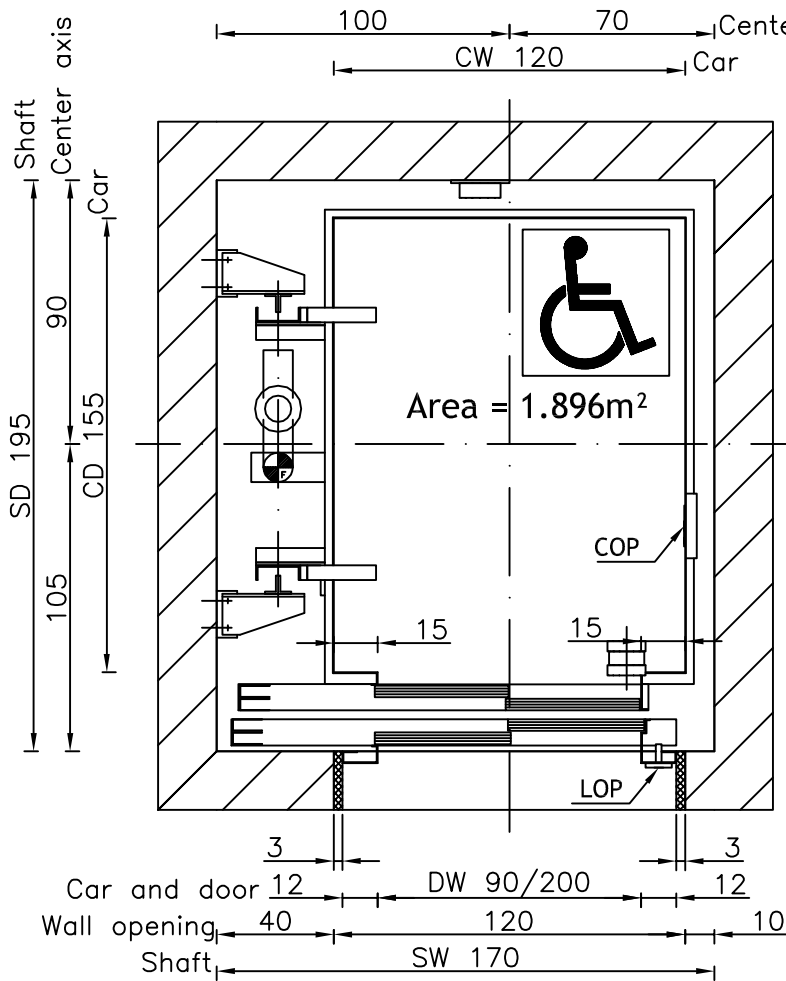

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 FD = Floor distance  
 COP= Car Operating Panel  
 LOP= Landing Operating Panel

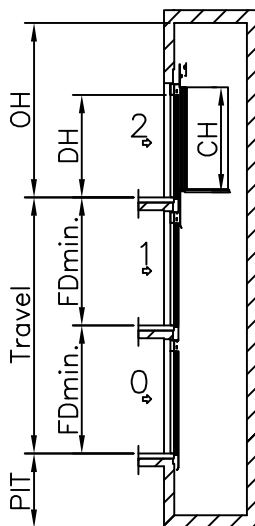

## HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	18,4kW
Running current	43 A
Starting current	54 A

Speed: 0,6 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 120 cm	DW: 90 cm
CD: 155 cm	DH: 200 cm
CH: 219 cm	
FDmin.: 250 (CH+50 cm)	

Dimensions in cm.

Type:	INDIRECT 750 kg TL9	Drawn By: Tomi Irgolič Date: 29.08.2008	
	HYDRAULIC	Revision: 00	
		A4 1:25	