



Well

All dimensions may not exceed perpendicular tolerance of ±2 cm

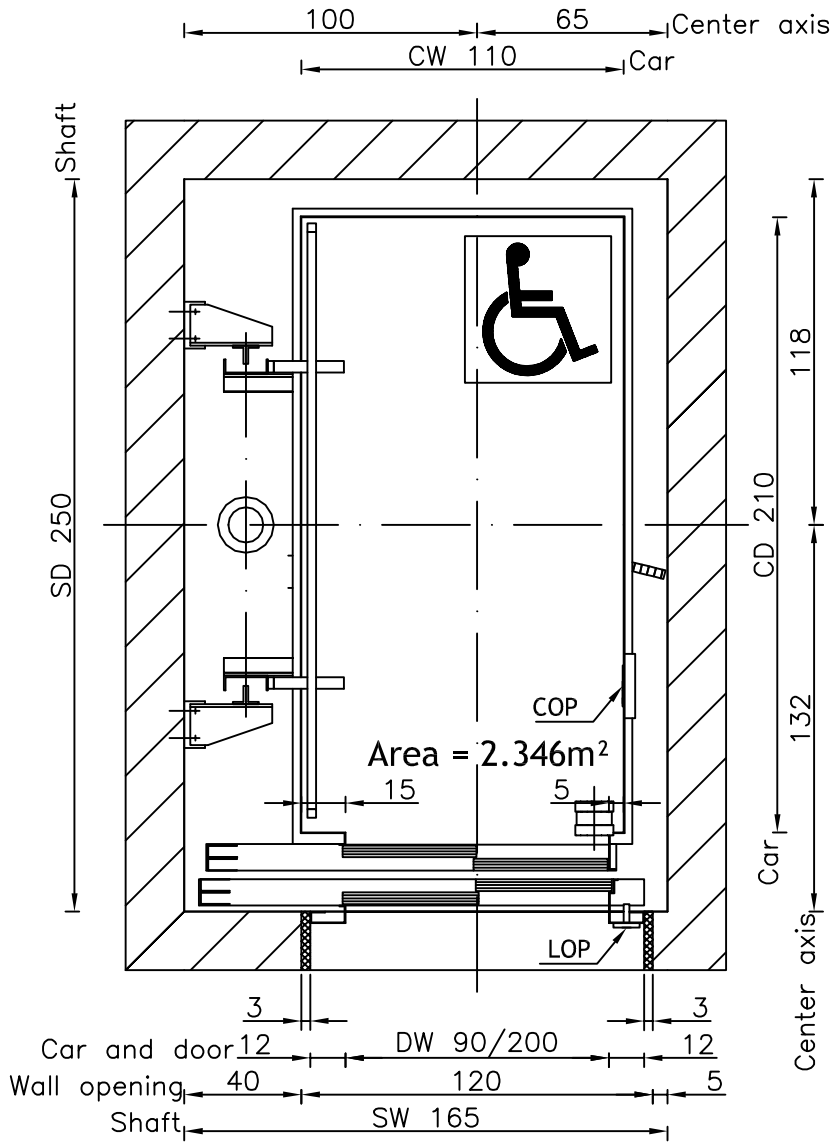

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP = Car Operating Panel
 LOP = Landing Operating Panel

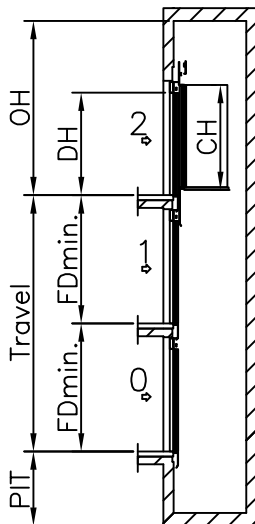

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	18,4kW
Running current	43 A
Starting current	54 A

Speed: 0,6 m/s
 PIT: 120 cm
 OH: 320 cm

CW: 110 cm DW: 90 cm
 CD: 210 cm DH: 200 cm
 CH: 219 cm
 FDmin.: 250 (CH+50 cm)

Dimensions in cm.

Type:	DIRECT 1000 kg TL9	Drawn By: Tomi Irgolič Date: 29.08.2008	
	HYDRAULIC	Revision: 00	