



# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

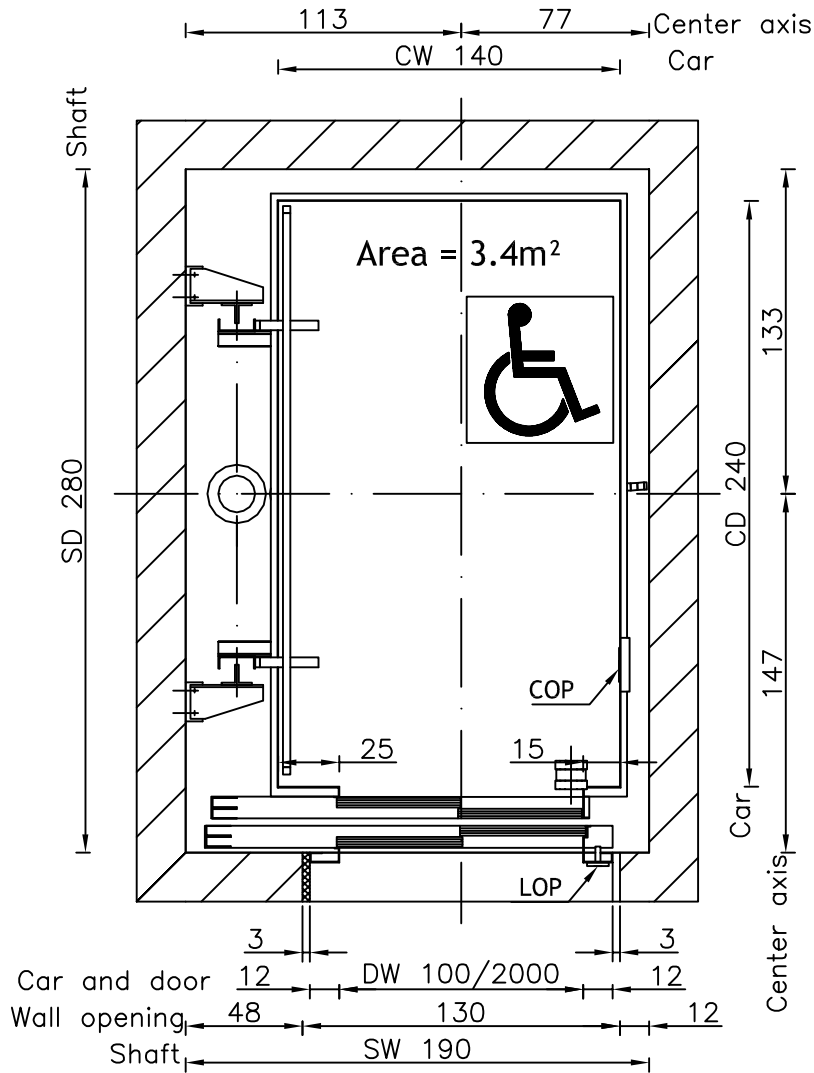

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 FD = Floor distance  
 COP= Car Operating Panel  
 LOP= Landing Operating Panel

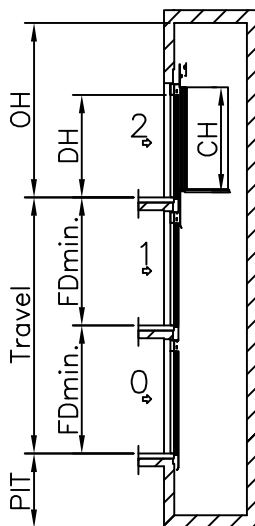

## HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	14,7kW
Running current	35,4A
Starting current	52 A

Speed: 0,3 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 140 cm	DW: 100 cm
CD: 240 cm	DH: 200 cm
CH: 219 cm	
FDmin.: 250 (CH+50 cm)	

Dimensions in cm.

Type:	DIRECT 1500 kg TL10		Drawn By: Tomi Irgolič	
			Date: 29.08.2008	
	HYDRAULIC	A4 1:30	Revision: 00	Page: 133