


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

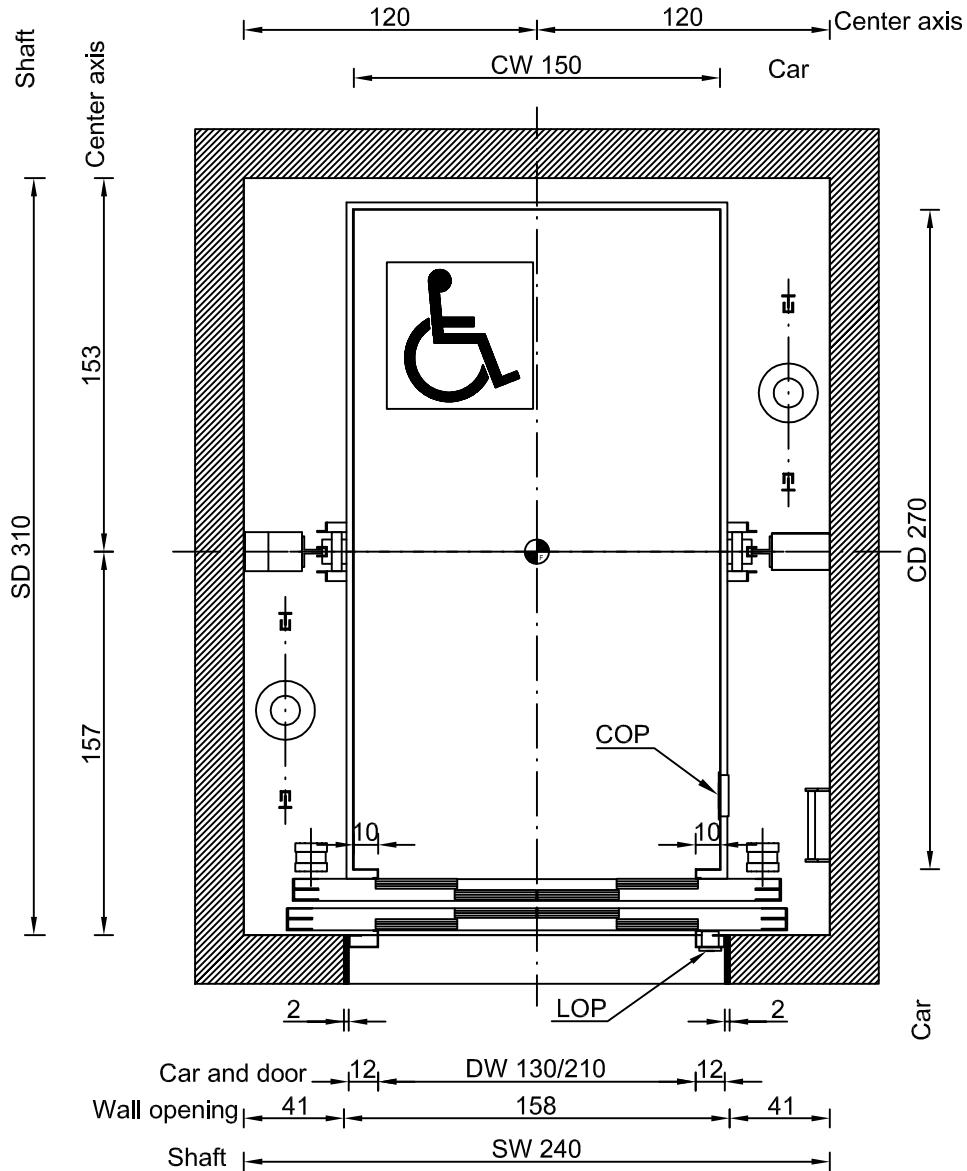


HYDRAULIC MACHINE ROOM REQUIREMENTS:

Maschine room min. dimension:
200 x 200

If space is limited beside the shaft the MR can be located up to 10 meters away.

Max. Travel height 320 cm.

- OH = Overhead
- CW = Car width
- CD = Car depth
- CH = Car height
- DW = Door width
- DH = Door height
- FD = Floor distance
- COP = Car Operating Panel
- LOP = Landing Operating Panel

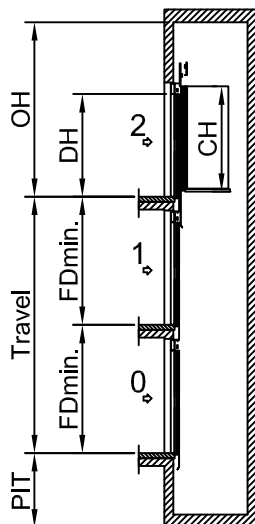

Speed: 0,43 m/s	
PIT: 140 cm	
OH: 350 cm	
CW: 150 cm	DW: 130 cm
CD: 270 cm	DH: 210 cm
CH: 230 cm	
FDmin.: 260 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	22,5 kW
Running current	52 A
Starting current	78 A

Dimensions in cm.

Type:	DIRECT 2000 kg CT13		Drawn By:	M. Kupec
			Date:	19.08.2008
			Revision:	
	HYDRAULIC	A4	Page:	135
		1:30	00	