
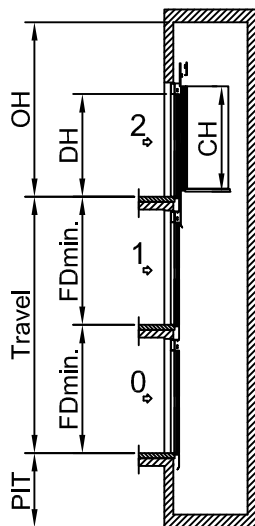


# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

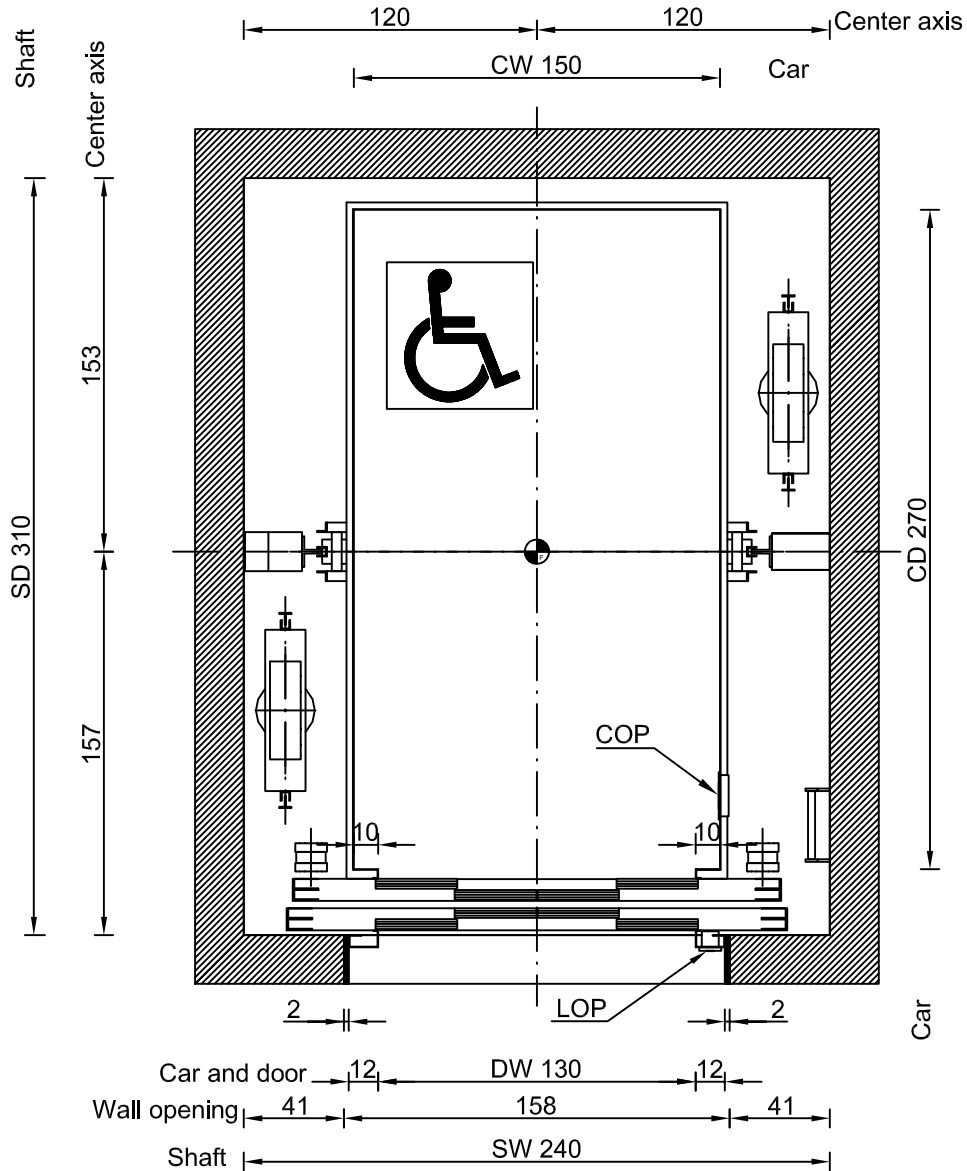

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 FD = Floor distance  
 COP = Car Operating Panel  
 LOP = Landing Operating Panel

Speed: 0,43 m/s	
PIT: 140 cm	
OH: 350 cm	
CW: 150 cm	DW: 130 cm
CD: 270 cm	DH: 210 cm
CH: 230 cm	
FDmin.: 260 (CH+50 cm)	

## HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension:  
 200 x 200

If space is limited beside the shaft the MR can be located up to 10 meters away.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	22,5 kW
Running current	52 A
Starting current	78 A

Dimensions in cm.

Type:	INDIRECT 2000 kg CT13		Drawn By:	M. Kupec
			Date:	19.08.2008
			Revision:	
	HYDRAULIC	A4	Page:	136
		1:30	00	