
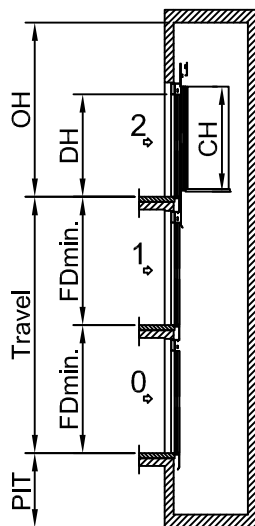


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

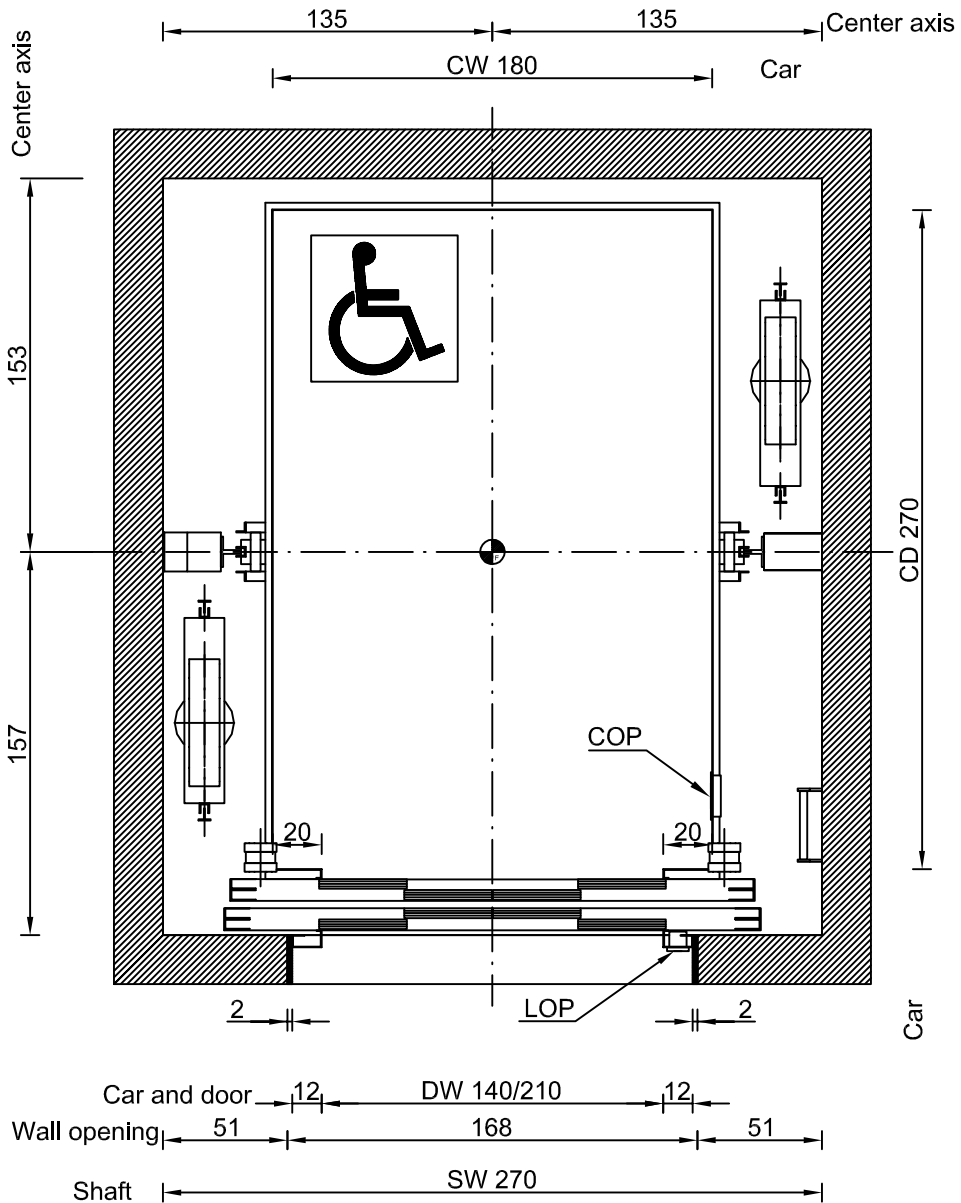

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP = Car Operating Panel
 LOP = Landing Operating Panel

Speed: 0,36 m/s	
PIT: 140 cm	
OH: 350 cm	
CW: 180 cm	DW: 140 cm
CD: 270 cm	DH: 210 cm
CH: 230 cm	
FDmin.: 260 (CH+50 cm)	

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	22,5 kW
Running current	52 A
Starting current	78 A

Dimensions in cm.

Type:	INDIRECT 2500 kg CT14		Drawn By:	M. Kupec
			Date:	19.08.2008
			Revision:	
HYDRAULIC	A4	00	Page: 137	
	1:30			