

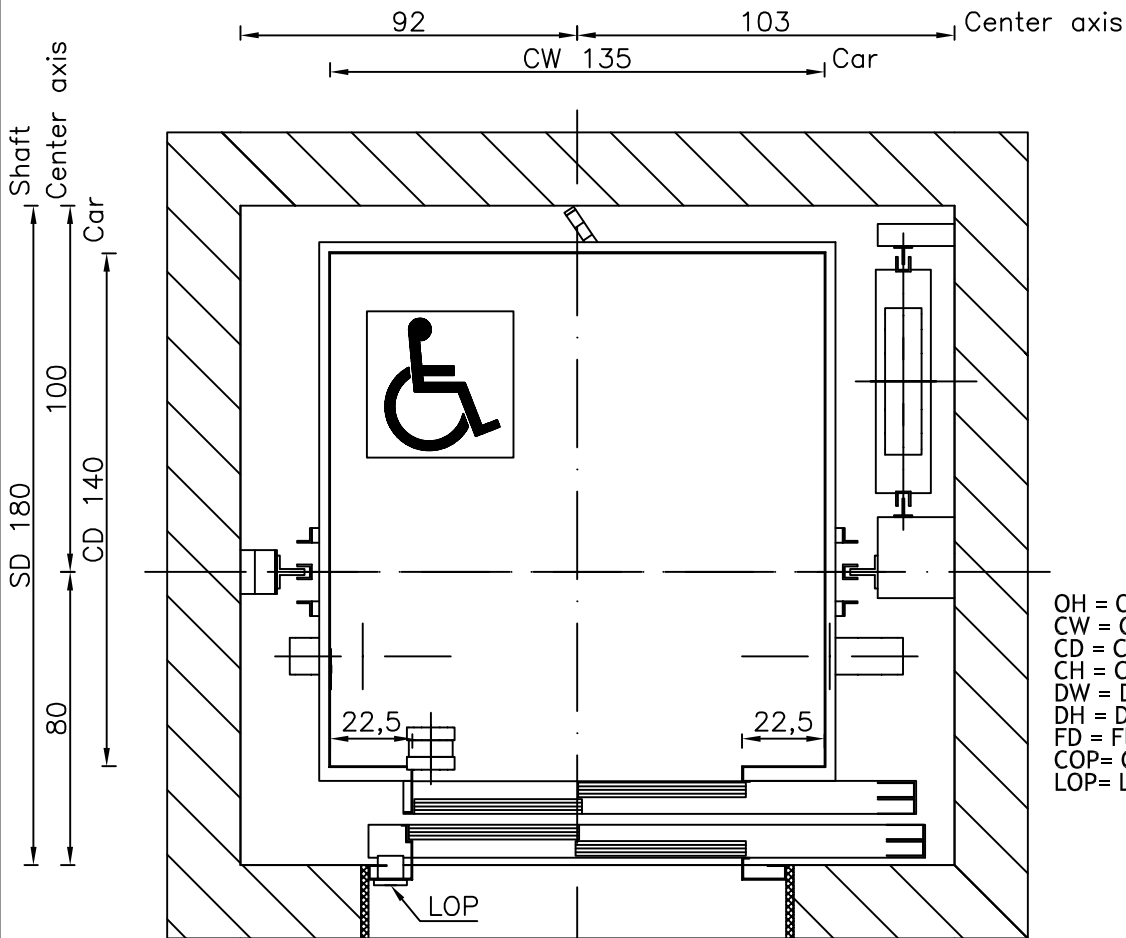
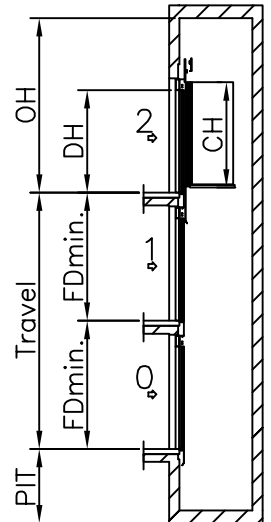


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

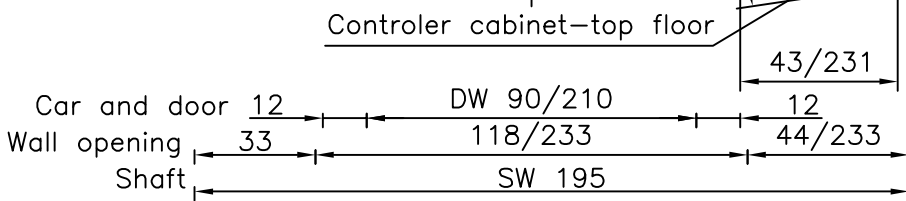

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP= Car Operating Panel
 LOP= Landing Operating Panel

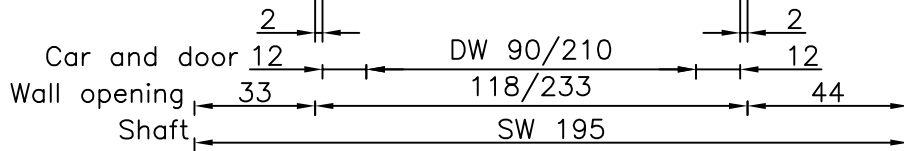

Speed: 1 m/s	
PIT: 140 cm	
OH: 370 cm	
CW: 135 cm	DW: 90 cm
CD: 140 cm	DH: 210 cm
CH: 220 cm	
FDmin.: 260 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	7,3 kW
Running current	17,5 A
Starting current	25 A
Overload current	32,5 A

Type:	GEARED MRL 800 kg TR9		Drawn By:	Tomi Irgotič
	ELECTRIC		Date:	
			Revision:	01
			Page:	14

Dimensions in cm.

