
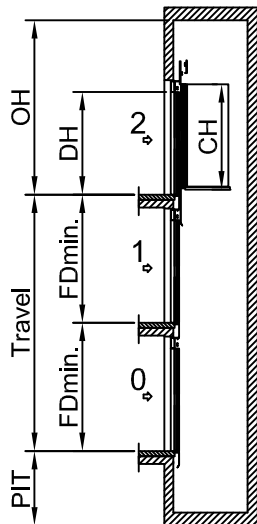


# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

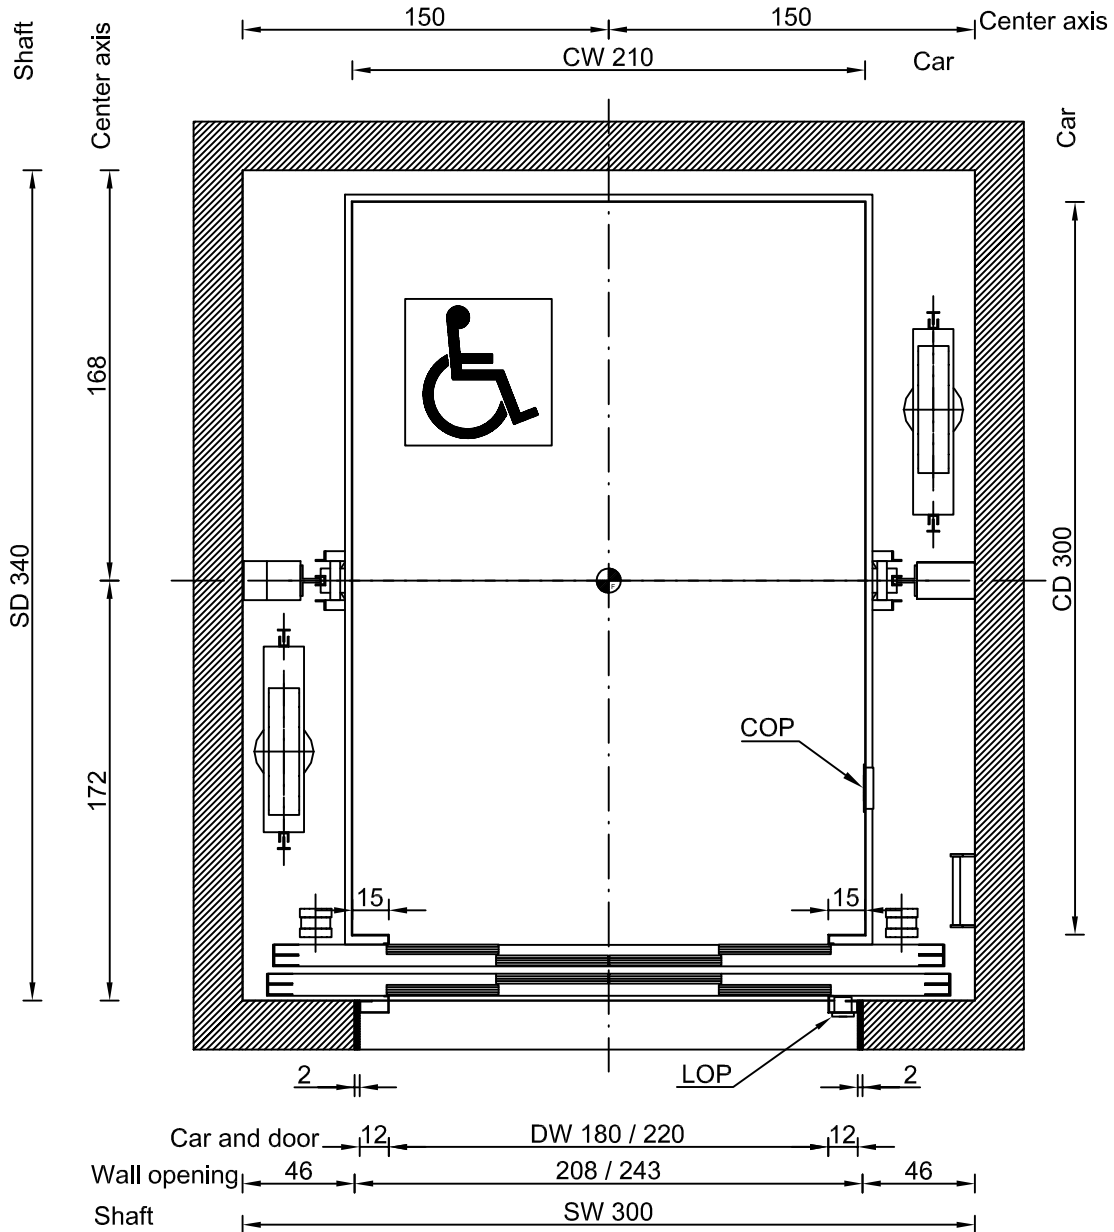

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 FD = Floor distance  
 COP = Car Operating Panel  
 LOP = Landing Operating Panel

Speed: 0,31 m/s	
PIT: 150 cm	
OH: 370 cm	
CW: 210 cm	DW: 180 cm
CD: 300 cm	DH: 220 cm
CH: 240 cm	
FDmin.: 270 (CH+50 cm)	

## HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	30 kW
Running current	68 A
Starting current	102 A

Dimensions in cm.

Type:	INDIRECT 3500 kg CT18		Drawn By:	M. Kupec
			Date:	19.08.2008
			Revision:	
	HYDRAULIC	A4	00	140
		1:30		