

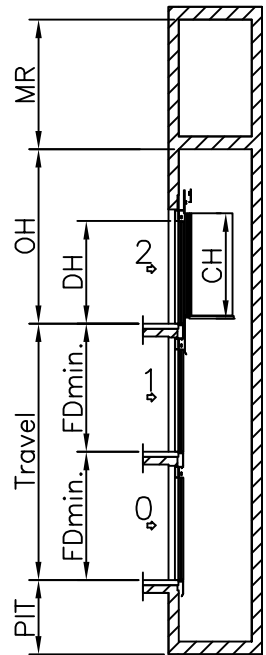


Well

All dimensions may not exceed perpendicular tolerance of ±2 cm

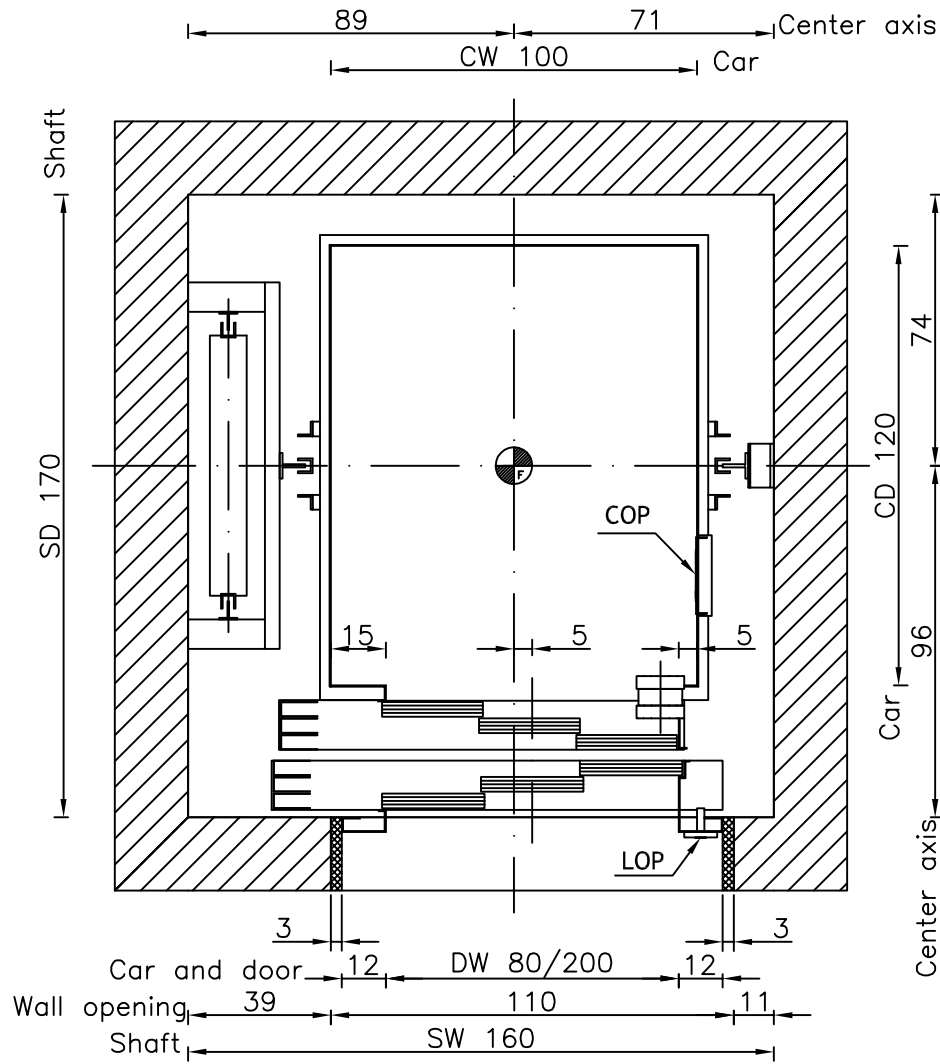

LOADS CAR GUIDE RAIL:

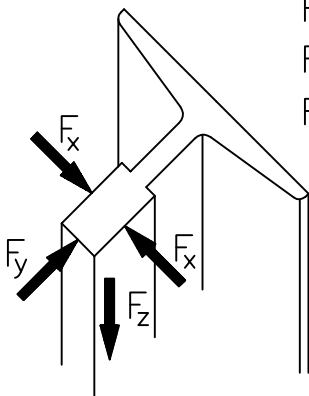

$$F_x = 510 \text{ N}$$

$$F_y = 472 \text{ N}$$

$$F_z = 12733 \text{ N}$$

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 MR = Machine room
 FD = Floor distance
 COP= Car Operating Panel
 LOP= Landing Operating Panel

Speed: 1 m/s	
PIT: 110 cm	
OH: 360 cm	
MR: 220 cm	
CW: 100 cm	DW: 80 cm
CD: 120 cm	DH: 200 cm
CH: 219 cm	
FDmin.: 250 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	4,8 kW
Starting current	11,5 A
Lift main fuse	16 A

Type:	MR 480 kg 3PL8	Drawn By: Tomi Irgolič	
		Date: 13.02.2009	
	ELECTRIC	Revision:	Page:
		A4	149
		1:20	00

Dimensions in cm.