

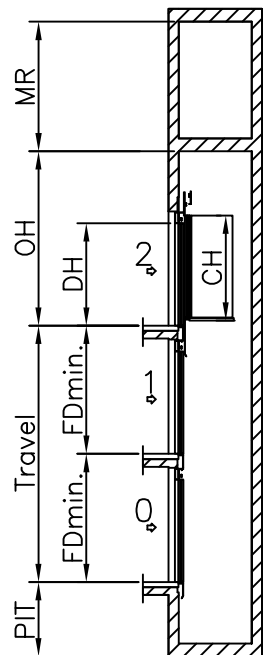


# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

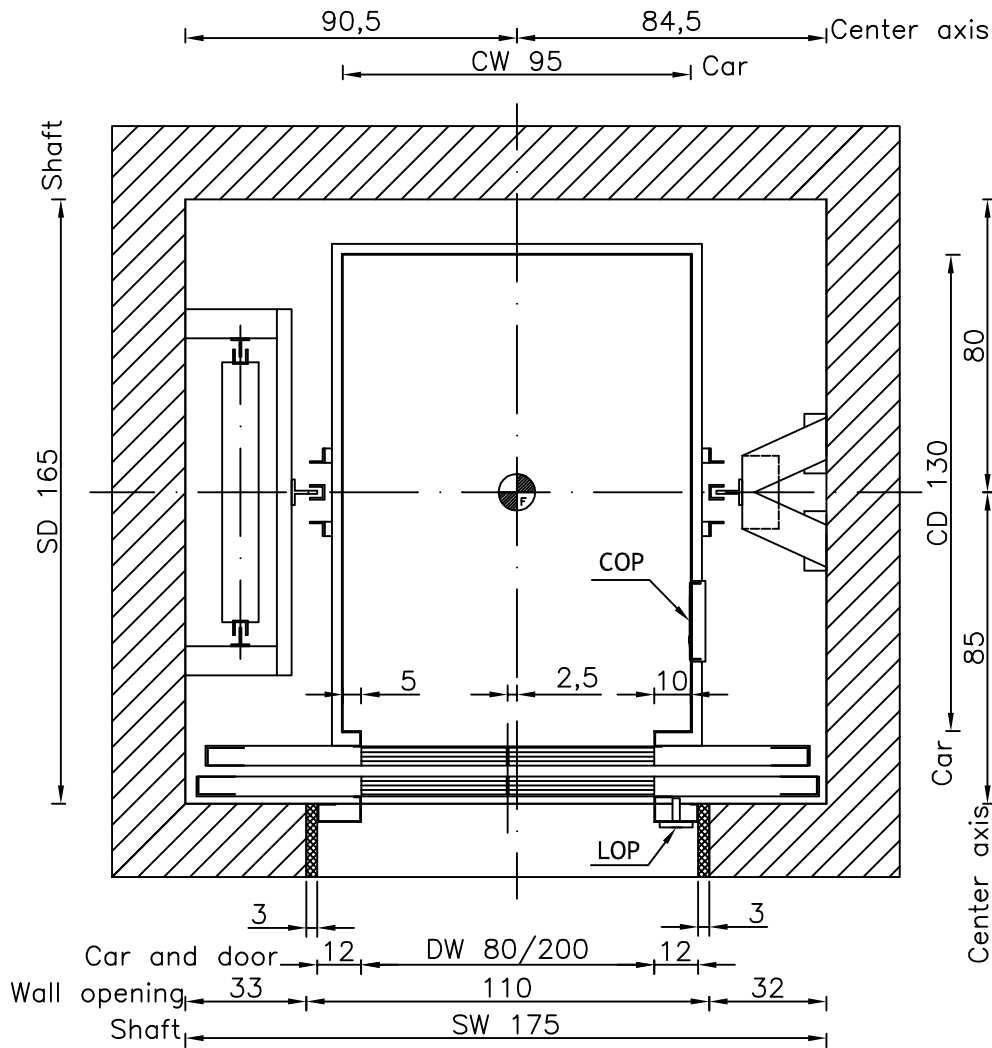

## LOADS CAR GUIDE RAIL:

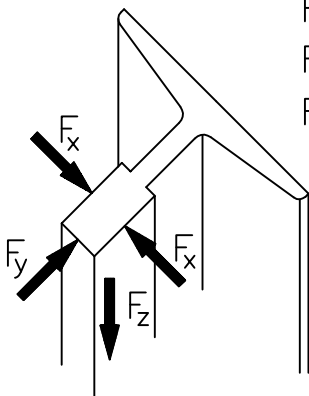

$$F_x = 510 \text{ N}$$

$$F_y = 472 \text{ N}$$

$$F_z = 12733 \text{ N}$$

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 MR = Machine room  
 FD = Floor distance  
 COP = Car Operating Panel  
 LOP = Landing Operating Panel

Speed: 1 m/s	
PIT: 110 cm	
OH: 360 cm	
MR: 220 cm	
CW: 95 cm	DW: 80 cm
CD: 130 cm	DH: 200 cm
CH: 219 cm	
FDmin.: 250 (CH+50 cm)	

Dimensions in cm.

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	4,8 kW
Starting current	11,5 A
Lift main fuse	16 A

Type:	MR 480 kg 2PC8	Drawn By: Tomi Irgolič	
		Date: 13.02.2009	
	ELECTRIC	Revision:	Page:
		A4	159
		1:20	00