
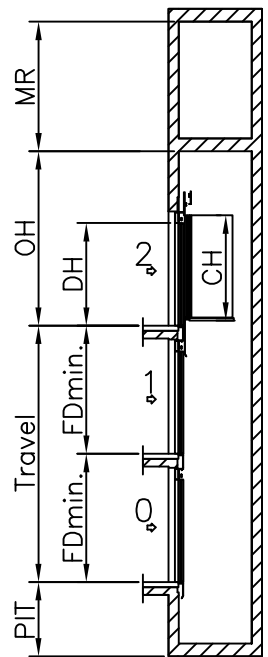


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

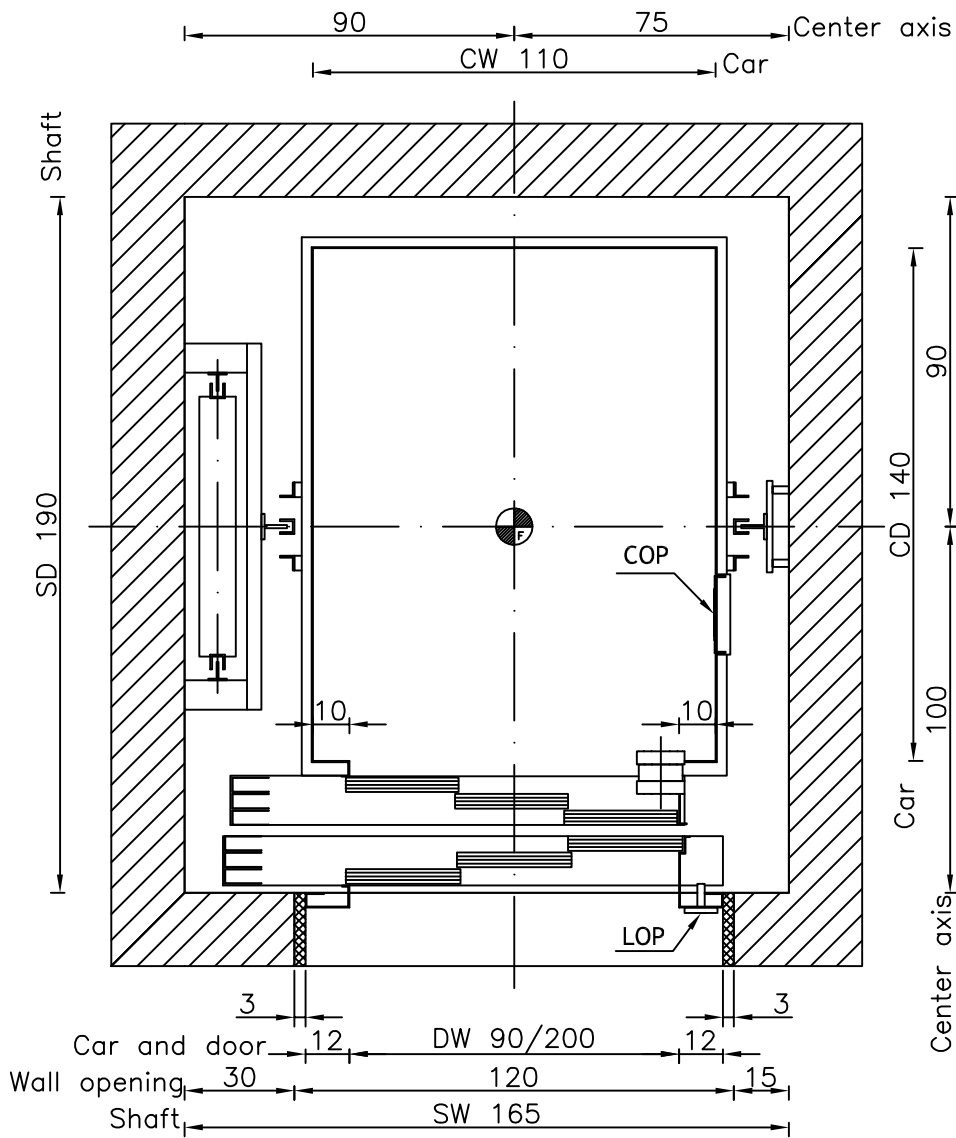


LOADS CAR GUIDE RAIL:

$$F_x = 694 \text{ N}$$

$$F_y = 629 \text{ N}$$

$$F_z = 14205 \text{ N}$$

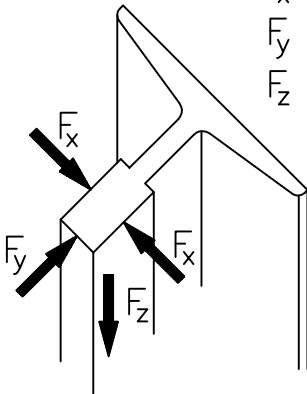

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 MR = Machine room
 FD = Floor distance
 COP = Car Operating Panel
 LOP = Landing Operating Panel

Speed: 1 m/s	
PIT: 110 cm	
OH: 360 cm	
MR: 220 cm	
CW: 110 cm	DW: 90 cm
CD: 140 cm	DH: 200 cm
CH: 219 cm	
FDmin.: 250 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	5,9 kW
Starting current	14,2 A
Lift main fuse	20 A

Type:	MR 630 kg 3PC9	Drawn By:	Tomi Irgolič	
		Date:	09.04.2009	
	ELECTRIC	Revision:	00	Page:
				169

Dimensions in cm.