

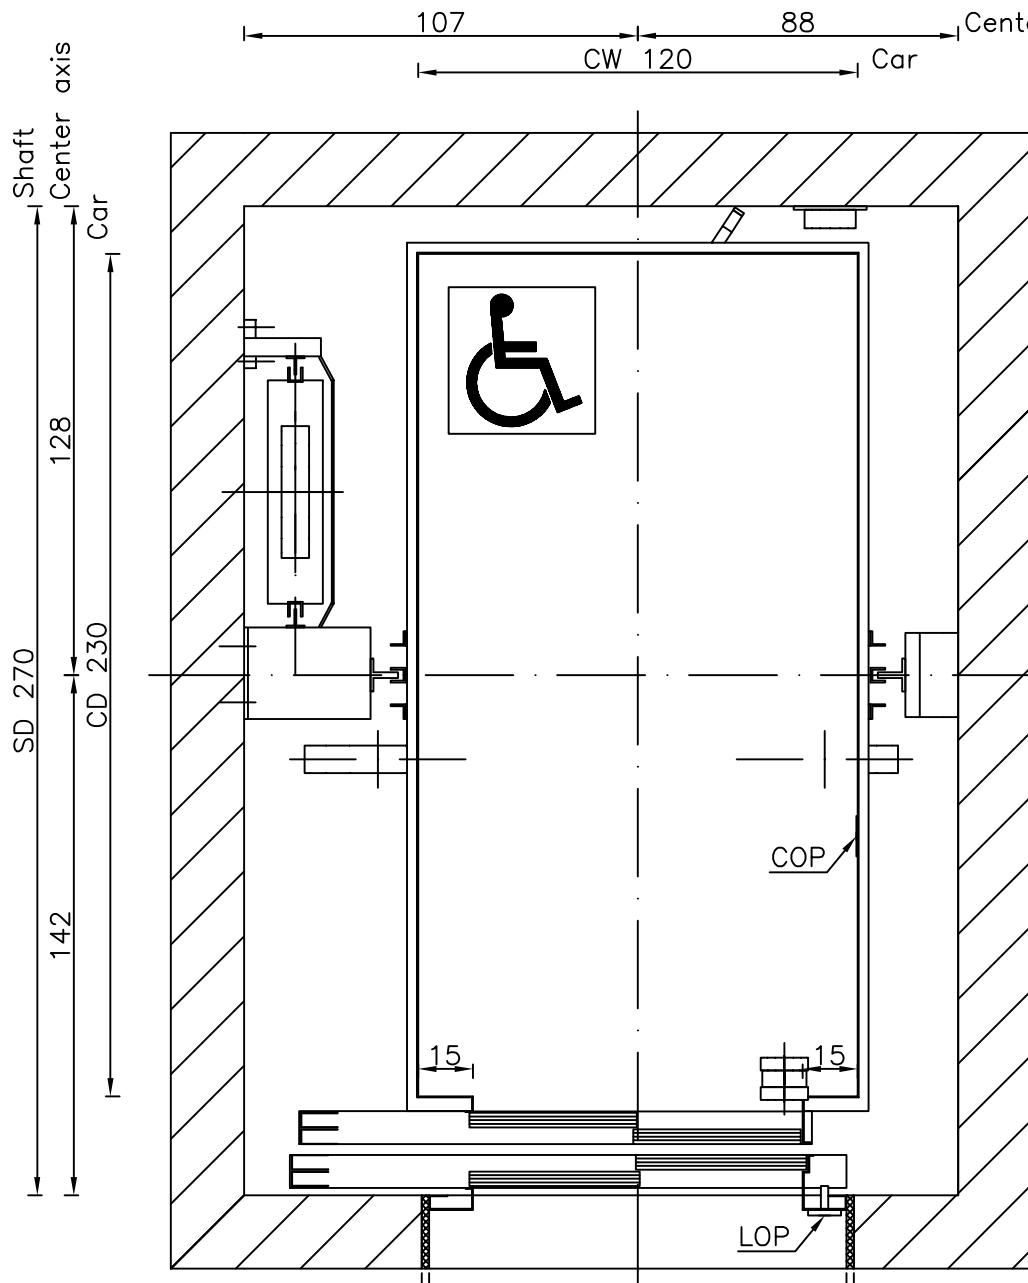
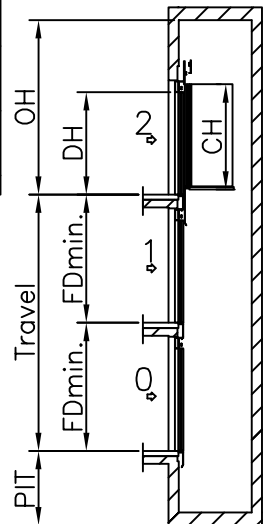
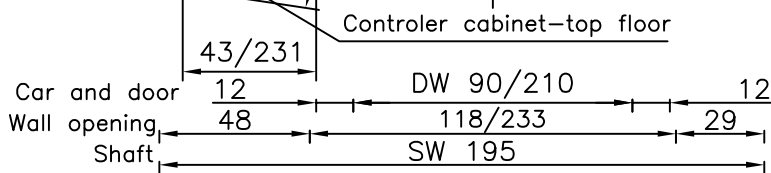


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

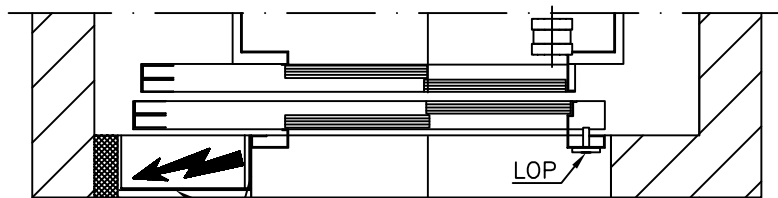

- OH = Overhead
- CW = Car width
- CD = Car depth
- CH = Car height
- DW = Door width
- DH = Door height
- FD = Floor distance
- COP= Car Operating Panel
- LOP= Landing Operating Panel

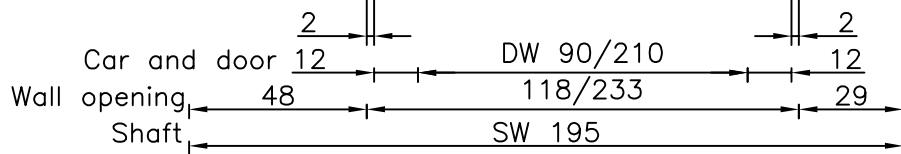

Speed: 1 m/s	
PIT: 140 cm	
OH: 370 cm	
CW: 120 cm	DW: 90 cm
CD: 230 cm	DH: 210 cm
CH: 220 cm	
FDmin.: 260 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	10 kW
Running current	21 A
Starting current	28 A
Overload current	36,4 A

Type: **GEARED MRL 1275 kg TL9**

ELECTRIC

Scale: **A4**
1:20

Revision: **00**

Page: **17**

Drawn By: Tomi Irgotič
Date: 19.10.2006
Revision: Page:

Dimensions in cm.