Well

All dimensions may not exceed perpendicular tolerance of ±2 cm

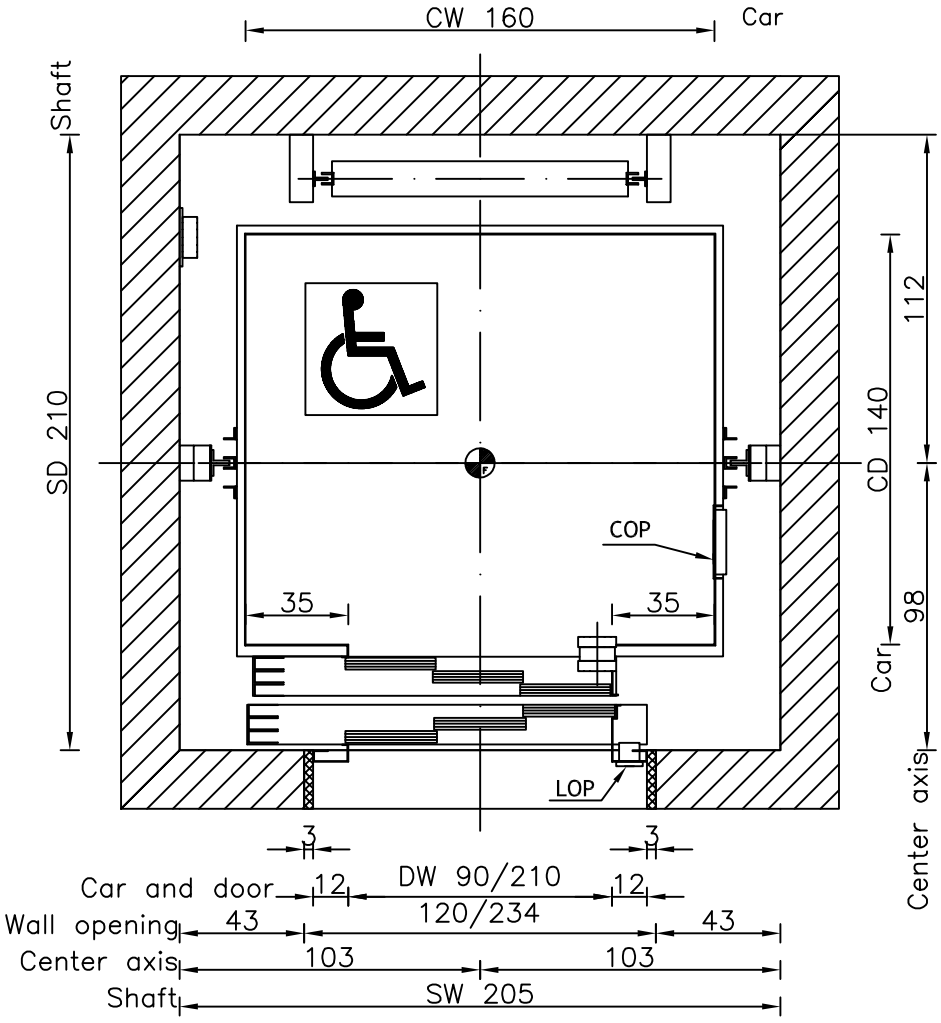

LOADS CAR GUIDE RAIL:

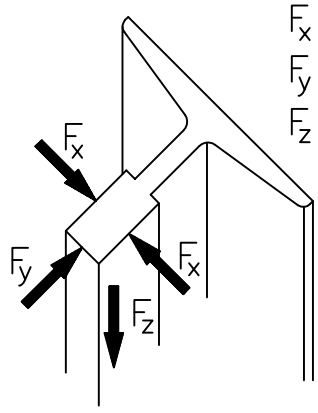

$F_x = 864$ N
$F_y = 1427$ N
$F_z = 23580$ N

OH = Overhead
CW = Car width
CD = Car depth
CH = Car height
DW = Door width
DH = Door height
MR = Machine room
FD = Floor distance
COP= Car Operating Panel
LOP= Landing Operating Panel

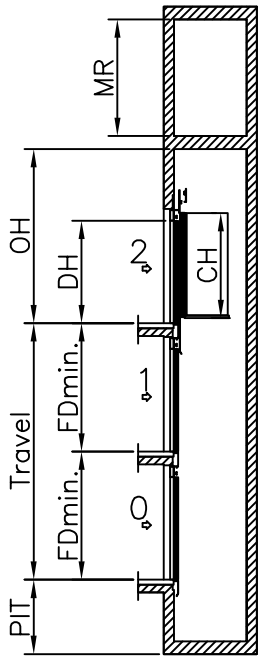

Speed: 1 m/s	
PIT: 110 cm	
OH: 360 cm	
MR: 220 cm	
CW: 160 cm	DW: 90 cm
CD: 140 cm	DH: 210 cm
CH: 229 cm	
FDmin.: 250 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	9,2 kW
Starting current	20,6 A
Lift main fuse	25 A

Dimensions in cm.

Type: MR 1000 kg 3PT 90			Drawn By: MK	sec
			Date: 12.02.2009	
ELECTRIC	A4	1:25	Revision: 00	Page: 189