



# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

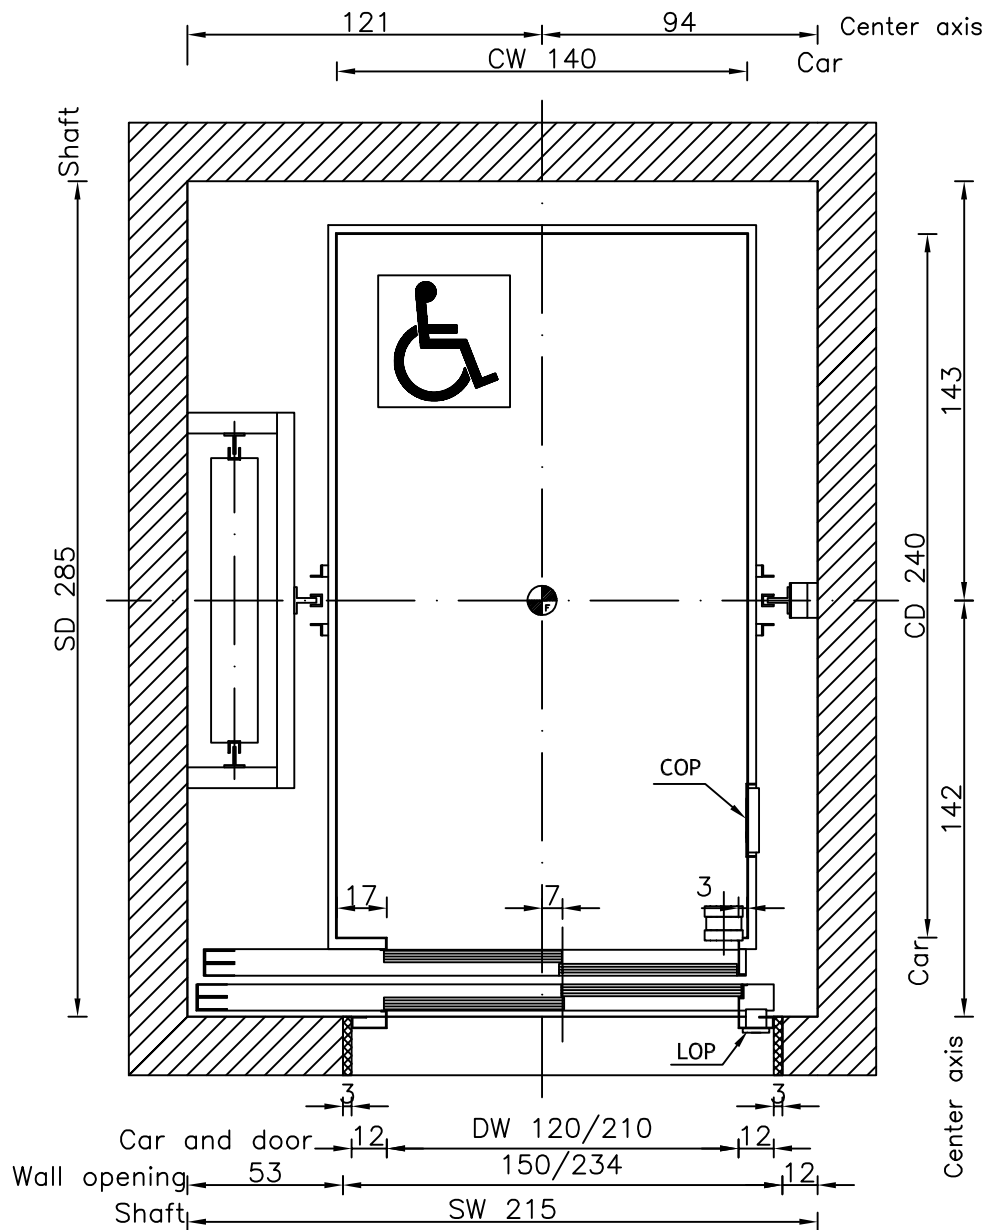

## LOADS CAR GUIDE RAIL:

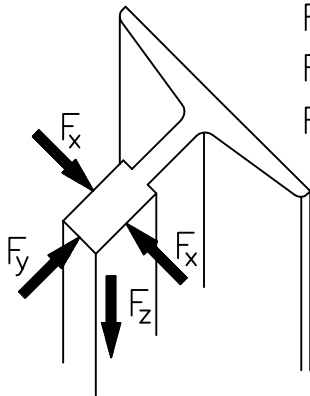


$$F_x = 1784 \text{ N}$$

$$F_y = 2012 \text{ N}$$

$$F_z = 34990 \text{ N}$$

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 MR = Machine room  
 FD = Floor distance  
 COP = Car Operating Panel  
 LOP = Landing Operating Panel

Speed: 1 m/s	
PIT: 140 cm	
OH: 370 cm	
MR: 220 cm	
CW: 140 cm	DW: 120 cm
CD: 240 cm	DH: 210 cm
CH: 229 cm	
FDmin.: 250 (CH+50 cm)	

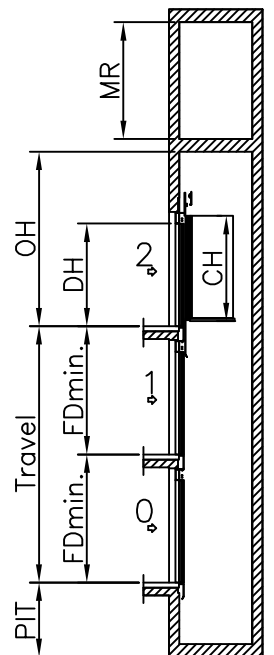

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	14,9 kW
Starting current	32 A
Lift main fuse	40 A

Type:	MR 1600 kg 2PT 120	Drawn By:	Tomi Irgolič	
		Date:	12.02.2009	
	ELECTRIC	Revision:	00	Page:
			199	

Dimensions in cm.