



Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

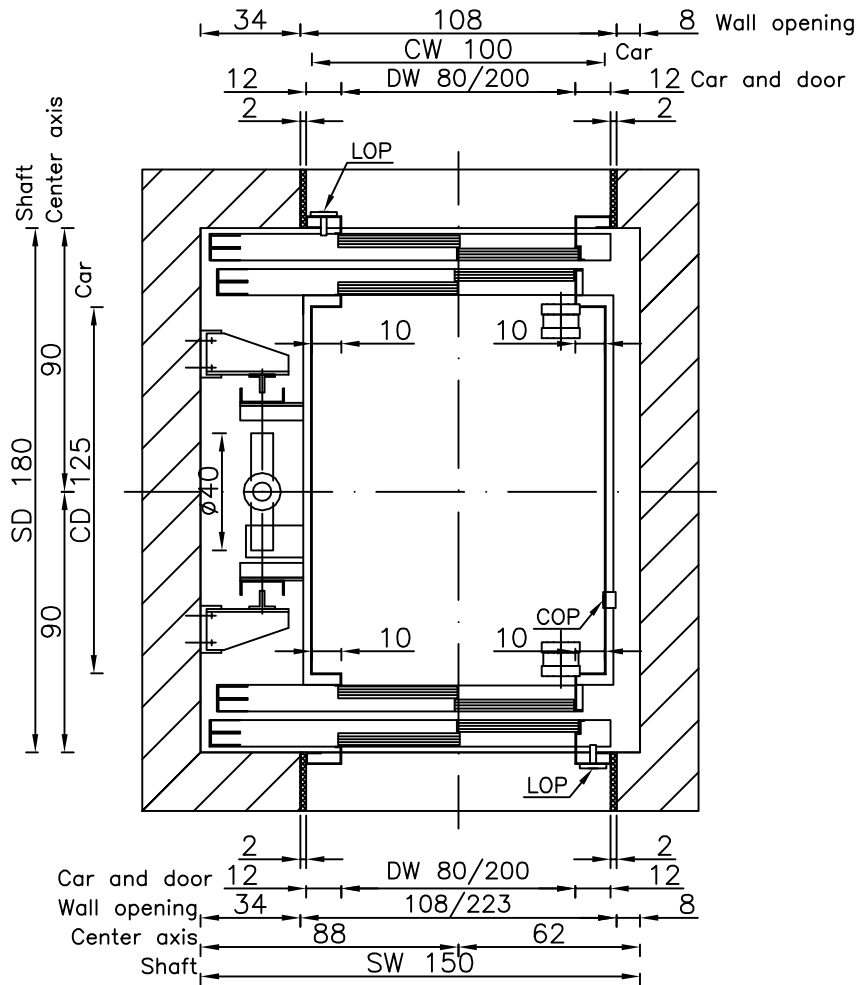

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP = Car Operating Panel
 LOP = Landing Operating Panel

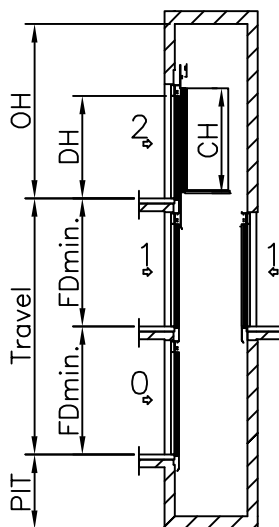

Speed: 0,6 m/s
 PIT: 120 cm
 OH: 320 cm

CW: 100 cm DW: 80 cm
 CD: 125 cm DH: 200 cm
 CH: 210 cm
 FDmin.: 250 (CH+50 cm)

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension: 150 x 165

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	10 kW
Running current	21 A
Starting current	28 A
Overload current	36,4A

Dimensions in cm.

Type:	INDIRECT 480 kg TL8-TR8		Drawn By:	Tomi Irgolič	
			Date:		
	HYDRAULIC	A4	Revision:	00	Page:
		1:25			34