



# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

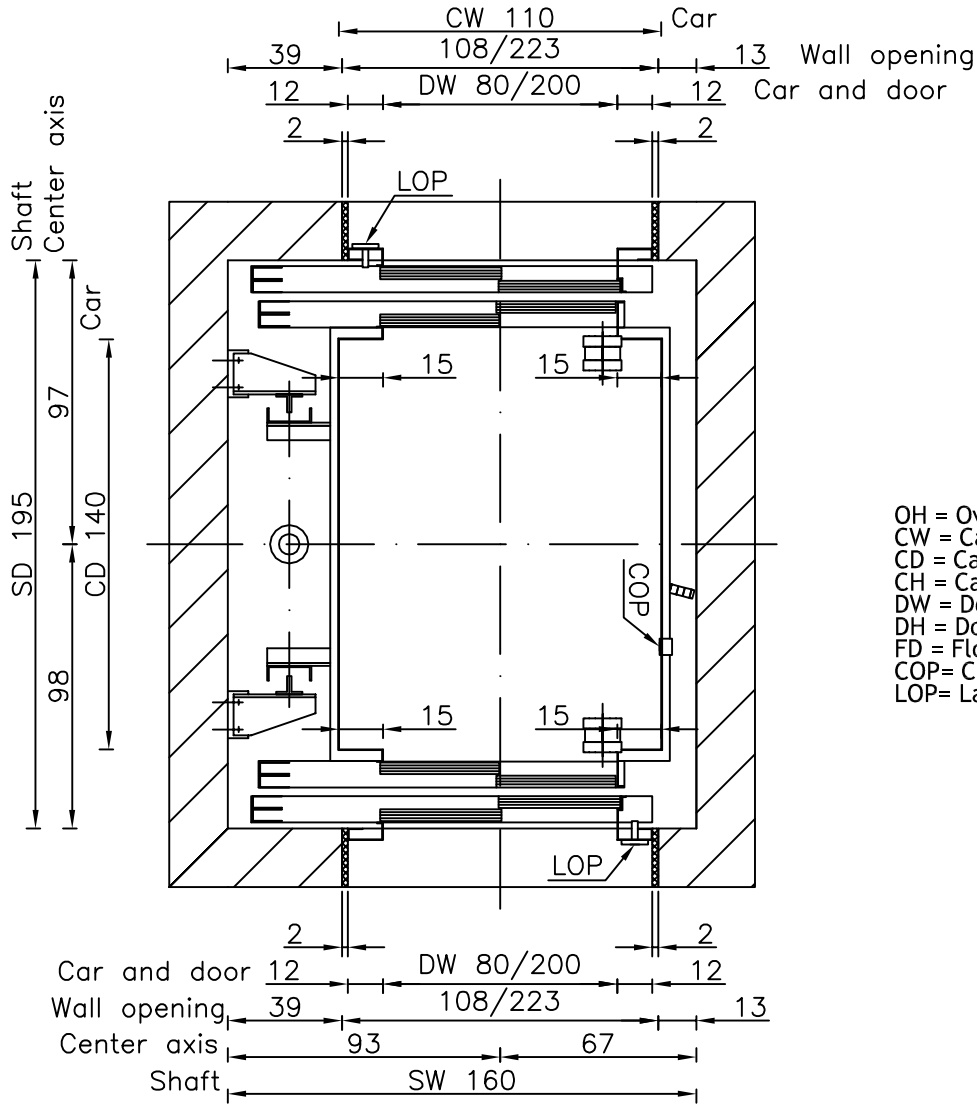

OH = Overhead  
 CW = Car width  
 CD = Car depth  
 CH = Car height  
 DW = Door width  
 DH = Door height  
 FD = Floor distance  
 COP = Car Operating Panel  
 LOP = Landing Operating Panel

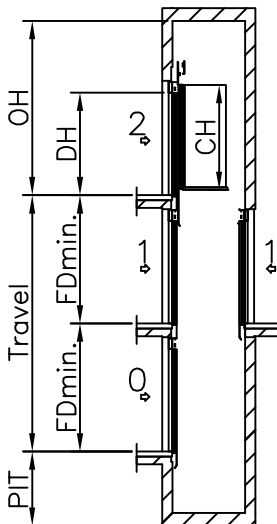

## HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

## HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min.  
 dimension:  
 160 x 180


## TYPICAL POWER REQUIREMENTS

Motor Power (k.W.)	10 kW
Running current	21 A
Starting current	28 A
Overload current	36,4A

Speed: 0,6 m/s  
 PIT: 120 cm  
 OH: 320 cm

CW: 110 cm DW: 80 cm  
 CD: 140 cm DH: 200 cm  
 CH: 210 cm  
 FDmin.: 250 (CH+50 cm)

Dimensions in cm.

Type:	DIRECT 630 kg TL8-TR8		Drawn By: Tomi Irgolič Date: 19.10.2006	 Page: <b>37</b>
	HYDRAULIC	A4 1:25	Revision: 00	