
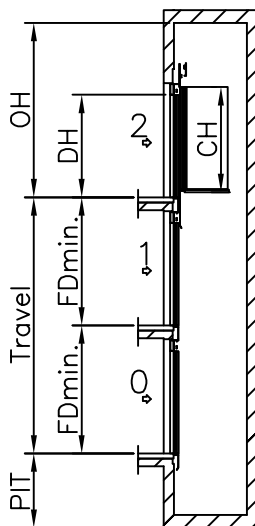


# Well

All dimensions may not exceed perpendicular tolerance of  $\pm 2$  cm

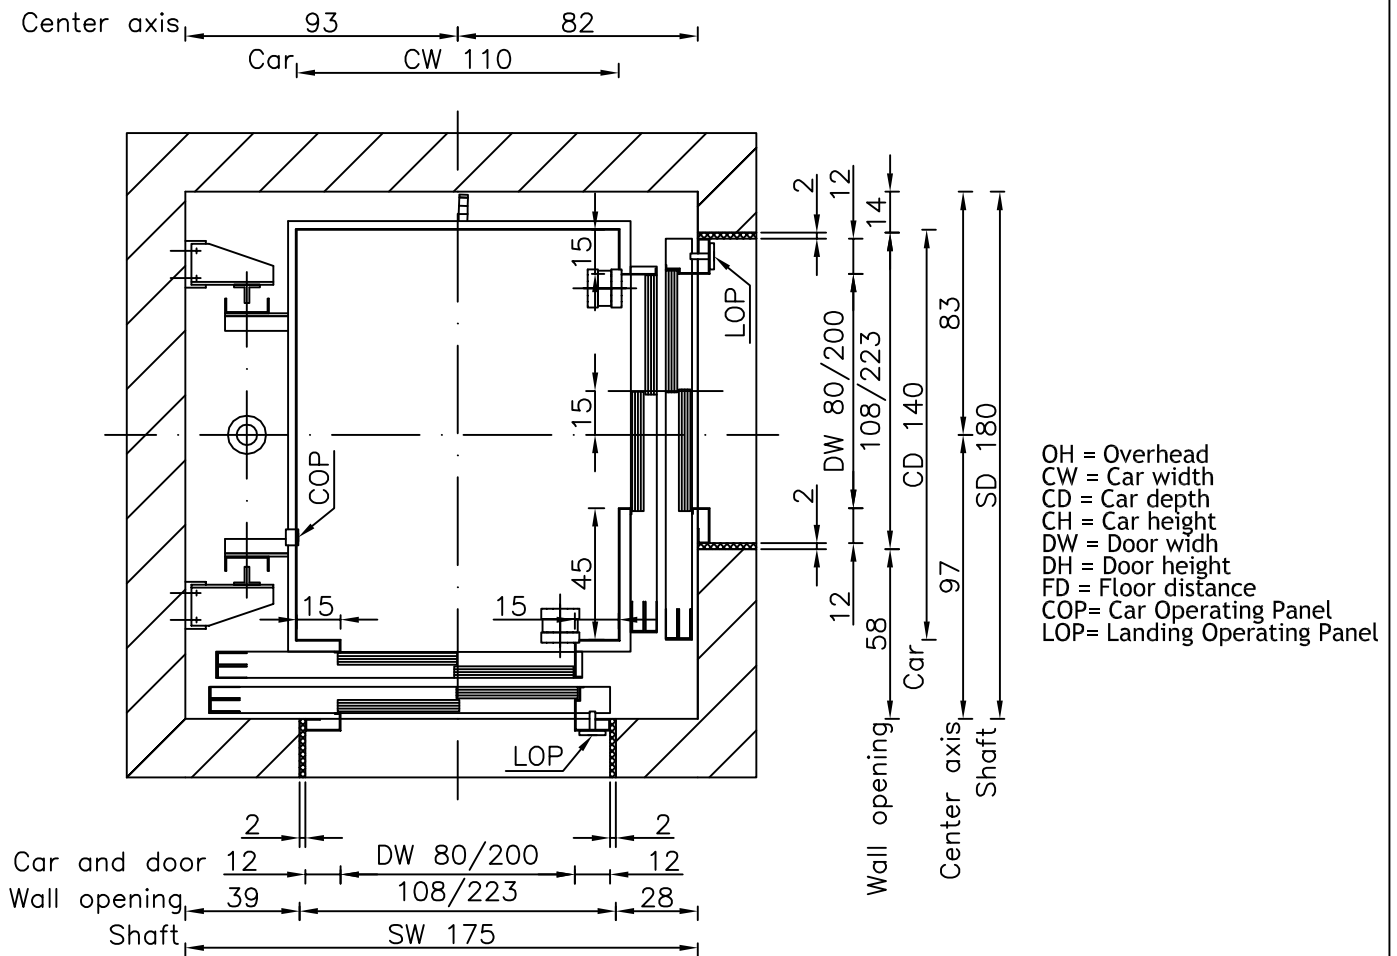

Speed: 0,6 m/s  
 PIT: 120 cm  
 OH: 320 cm

CW: 110 cm    DW: 80 cm  
 CD: 140 cm    DH: 200 cm  
 CH: 210 cm  
 FDmin.: 250 (CH+50 cm)

## HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

## HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension: 160 x 180

### TYPICAL POWER REQUIREMENTS

Motor Power (k.W.)	10 kW
Running current	21 A
Starting current	28 A
Overload current	36,4A

Dimensions in cm.

Type:	DIRECT 630 kg TL8-TL8		Drawn By: Tomi Irgolič	
			Date: 19.10.2006	
	HYDRAULIC	A4 1:25	Revision: 00	Page: 38