Well

All dimensions may not exceed perpendicular tolerance of ±2 cm

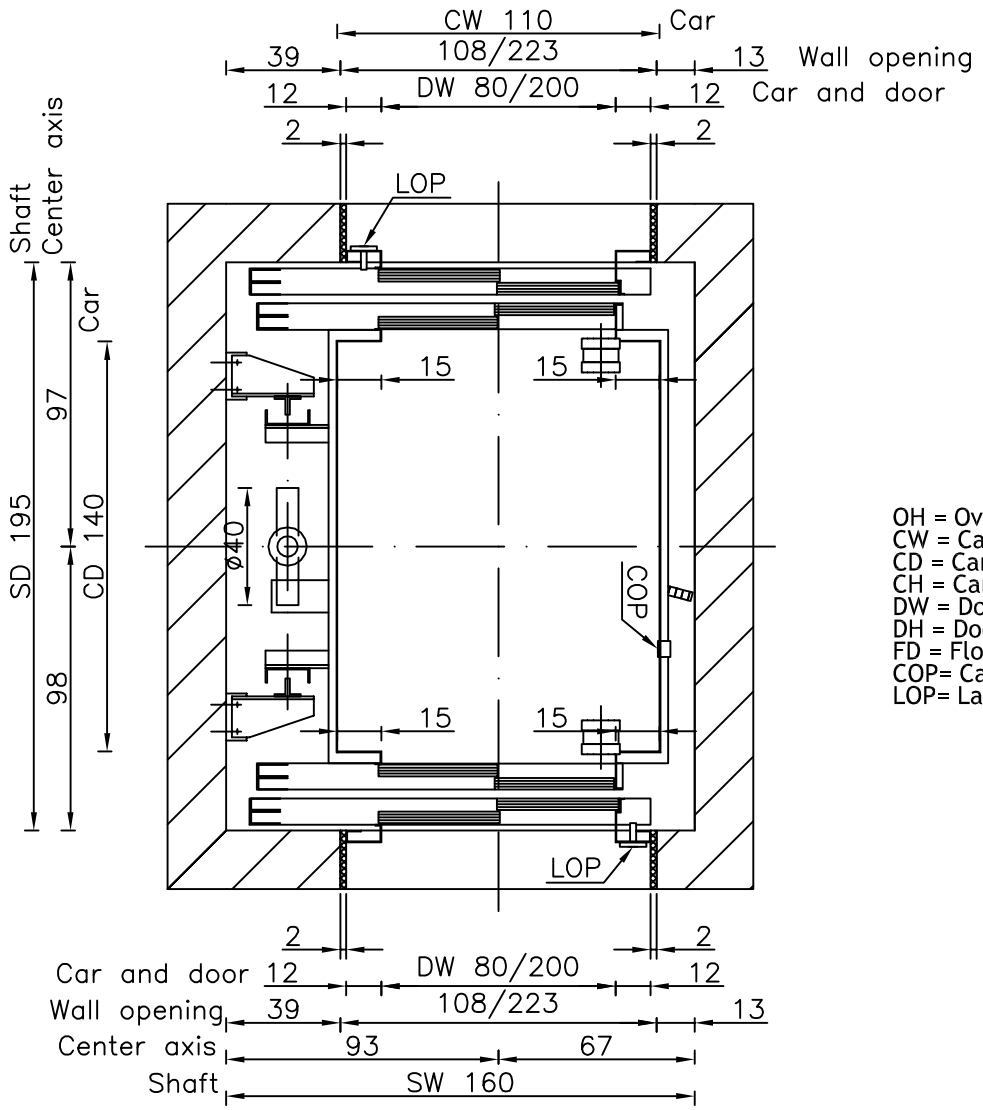

OH = Overhead
CW = Car width
CD = Car depth
CH = Car height
DW = Door widh
DH = Door height
FD = Floor distance
COP= Car Operating Panel
LOP= Landing Operating Panel

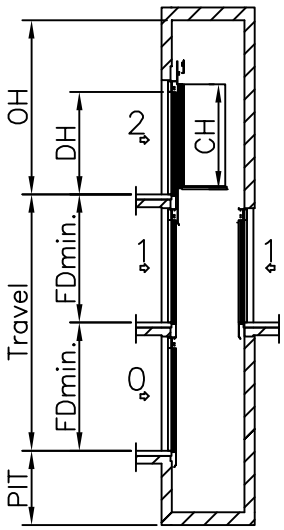

Speed: 0,6 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 110 cm	DW: 80 cm
CD: 140 cm	DH: 200 cm
CH: 210 cm	
FDmin.: 250 (CH+50 cm)	

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension:
160 x 180

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	12 kW
Running current	26,5A
Starting current	36 A
Overload current	46,8A

Dimensions in cm.

Type: INDIRECT 630 kg TL8-TR8		Drawn By: Tomi Irgolič Date: 19.10.2006	SEC
HYDRAULIC	A4 1:25	Revision: 00	Page: 40