

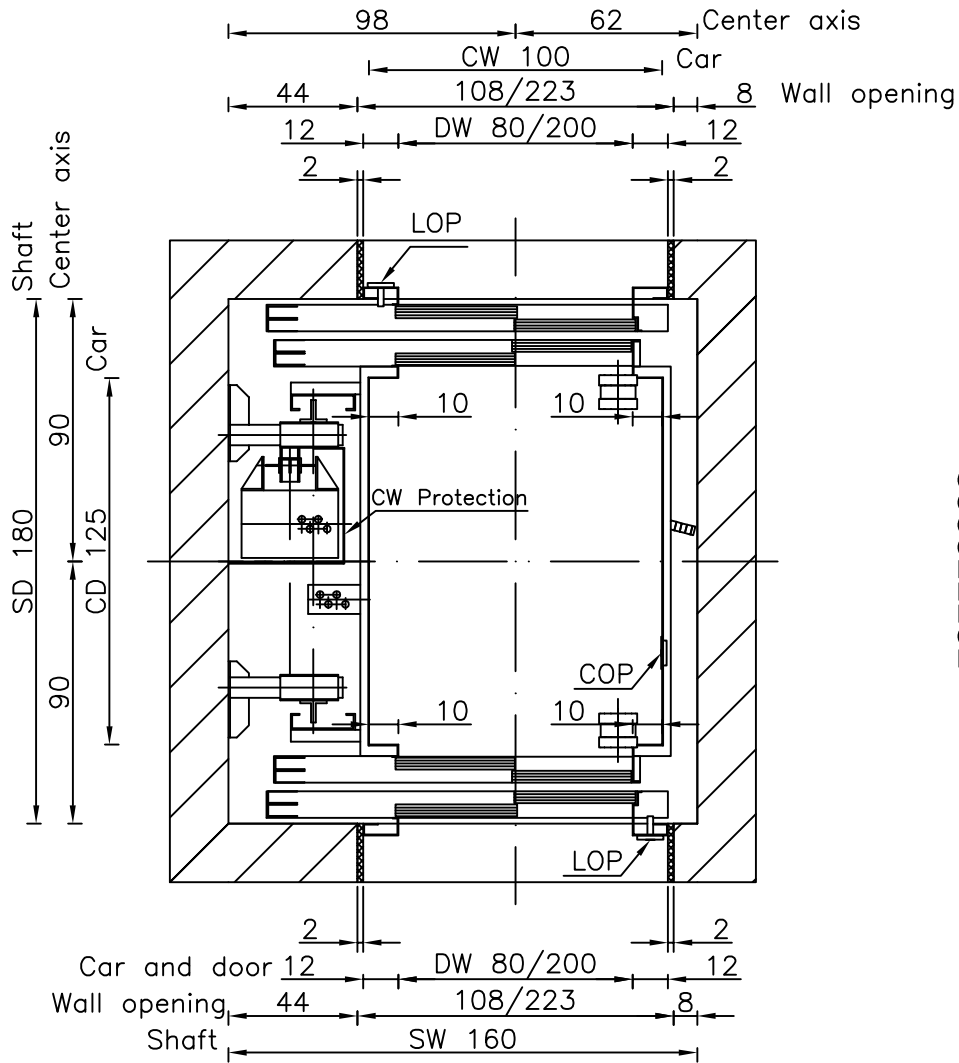


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

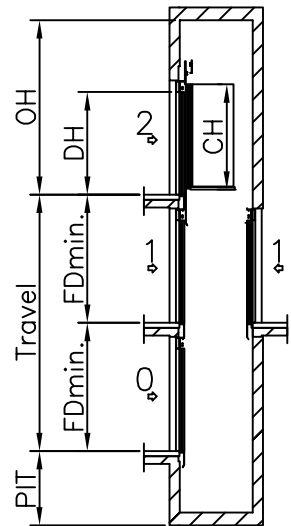

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP = Car Operating Panel
 LOP = Landing Operating Panel

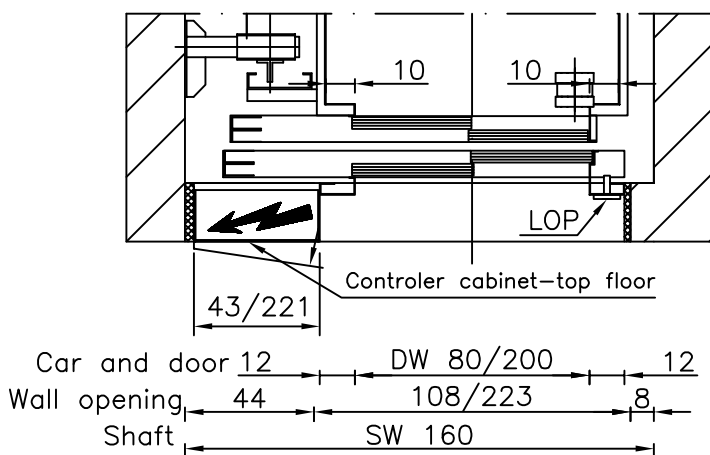

Speed: 1 m/s	PIT: 120 cm
OH: 360 cm	
CW: 100 cm	DW: 80 cm
CD: 125 cm	DH: 200 cm
CH: 210 cm	
FDmin.: 250 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	7,3kW
Running current	17,5A
Starting current	25 A
Overload current	32,5A

Dimensions in cm.

Type:	GEARED MRL 480 kg TL8-TR8		Drawn By:	Tomi Irgotič	SEC
			Date:		
	ELECTRIC	A4	Revision:	00	Page:
		1:20			43