Well

All dimensions may not exceed perpendicular tolerance of ±2 cm

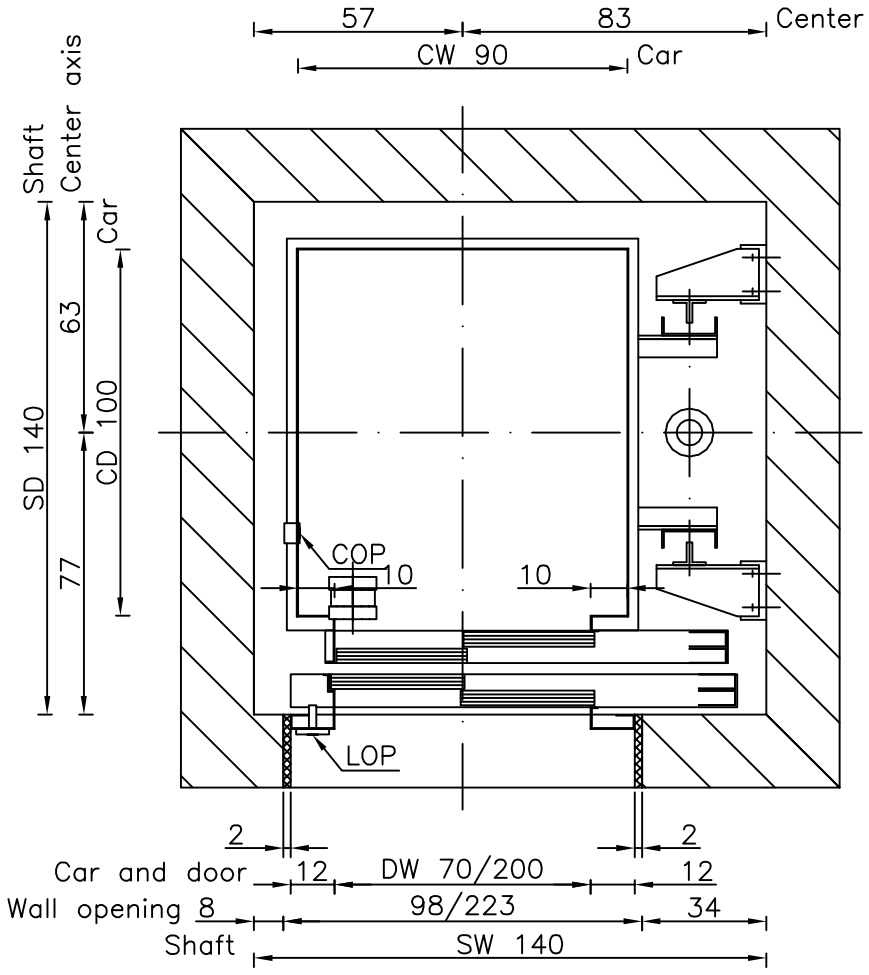

OH = Overhead
CW = Car width
CD = Car depth
CH = Car height
DW = Door widh
DH = Door height
FD = Floor distance
COP= Car Operating Panel
LOP= Landing Operating Panel

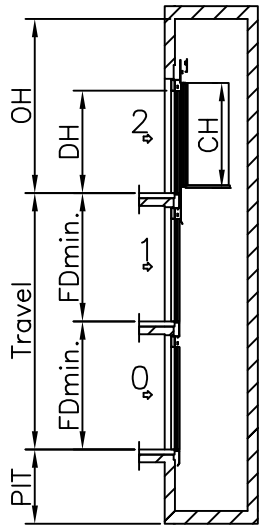

Speed: 0,6 m/s PIT: 120 cm OH: 320 cm

CW: 90 cm CD: 100 cm CH: 210 cm	DW: 70 cm DH: 200 cm
FDmin.: 250 (CH+50 cm)	

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

Max. Travel height 320 cm.

HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension:
150 x 165

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	8 kW
Running current	15,4A
Starting current	23 A
Overload current	30 A

Dimensions in cm.

Type: DIRECT 320 kg TR7		Drawn By: Tomi Irgolič Date: 19.10.2006	SEC
HYDRAULIC	A4 1:20	Revision: 00	Page: 62