
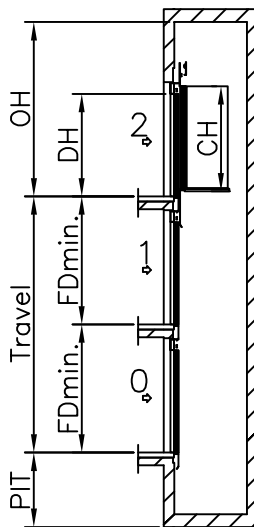


Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

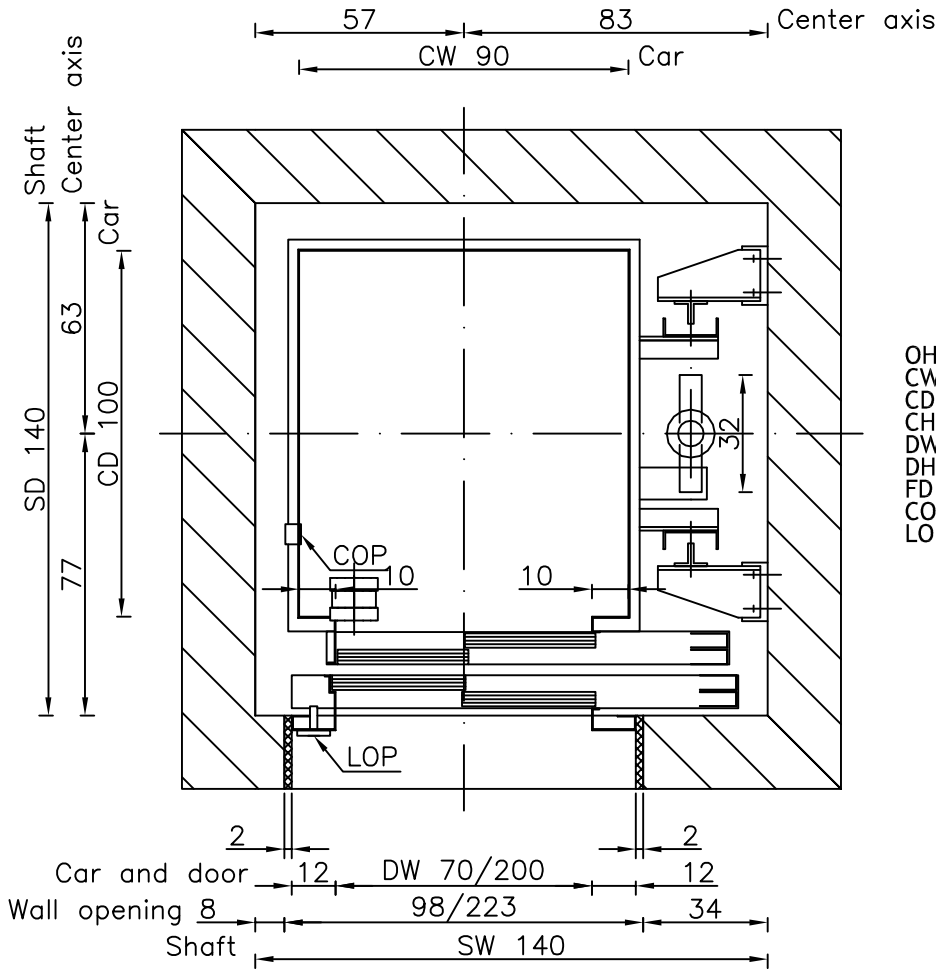

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension: 150 x 165

Speed: 0,6 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 90 cm	DW: 70 cm
CD: 100 cm	DH: 200 cm
CH: 210 cm	
FDmin.: 250 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	8 kW
Running current	15,4A
Starting current	23 A
Overload current	30 A

Dimensions in cm.

Type:	INDIRECT 320 kg TR7		Drawn By: Tomi Irgolič	
			Date: 19.10.2006	
	HYDRAULIC	A4 1:20	Revision: 00	Page: 64