



Well

All dimensions may not exceed perpendicular tolerance of ± 2 cm

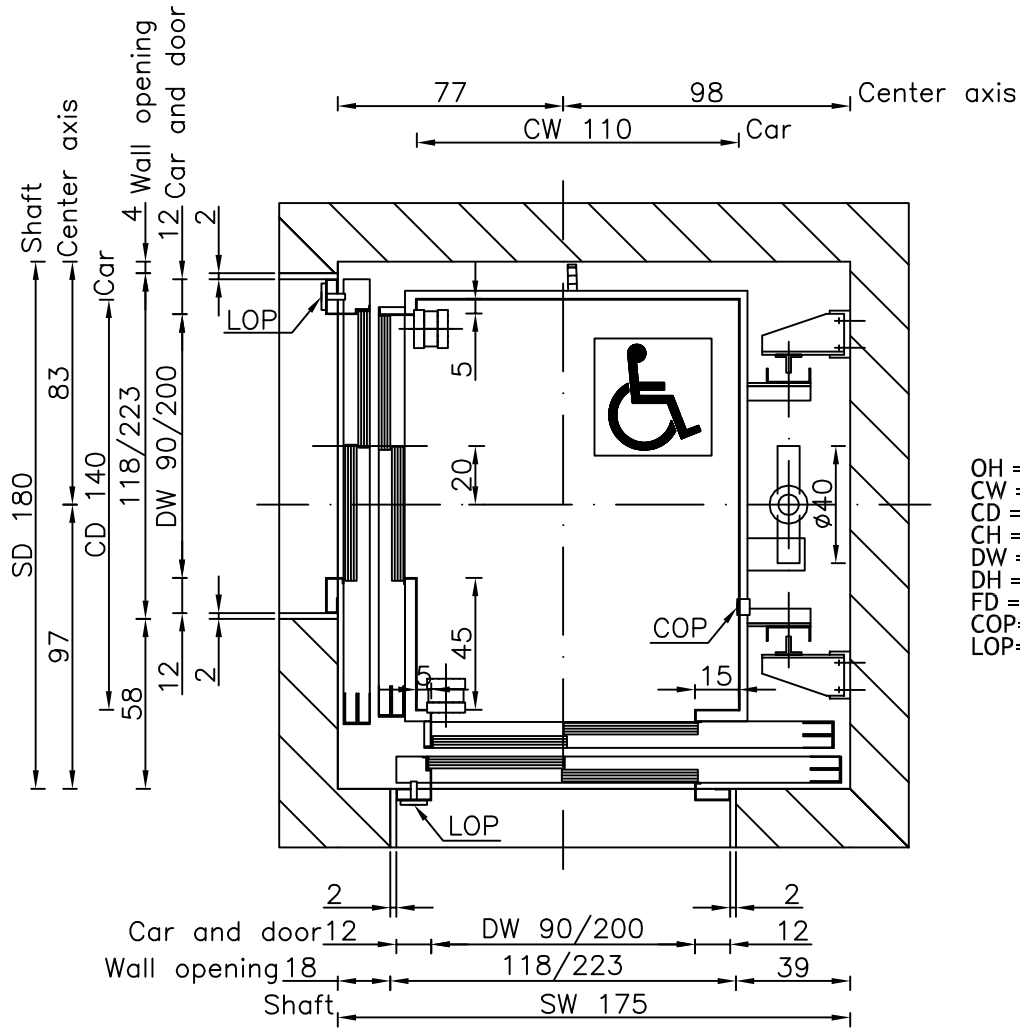

OH = Overhead
 CW = Car width
 CD = Car depth
 CH = Car height
 DW = Door width
 DH = Door height
 FD = Floor distance
 COP = Car Operating Panel
 LOP = Landing Operating Panel

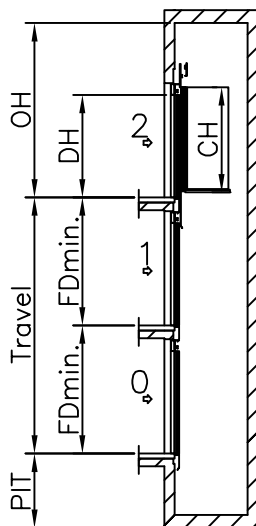

HYDRAULIC MOTOR-ROOMLESS OPTIONS:

The space saving design cleverly houses the motor in a cabinet that can either be located on or recessed into an adjacent wall.

If space is limited beside the shaft the cabinet can be located up to 10 meters away.

HYDRAULIC MASCHINE ROOM REQUIREMENTS:

Maschine room min. dimension: 160 x 180

Speed: 0,6 m/s	
PIT: 120 cm	
OH: 320 cm	
CW: 110 cm	DW: 90 cm
CD: 140 cm	DH: 200 cm
CH: 210 cm	
FDmin.: 250 (CH+50 cm)	

TYPICAL POWER REQUIREMENTS	
Motor Power (k.W.)	10 kW
Running current	21 A
Starting current	28 A
Overload current	36,4A

Dimensions in cm.

Type: INDIRECT 630 kg TR9-TR9		Drawn By: Tomi Irgolič	
		Date: 23.02.2007	
HYDRAULIC	A4	Revision: 00	Page: 90
	1:25		