


DATA SHEET

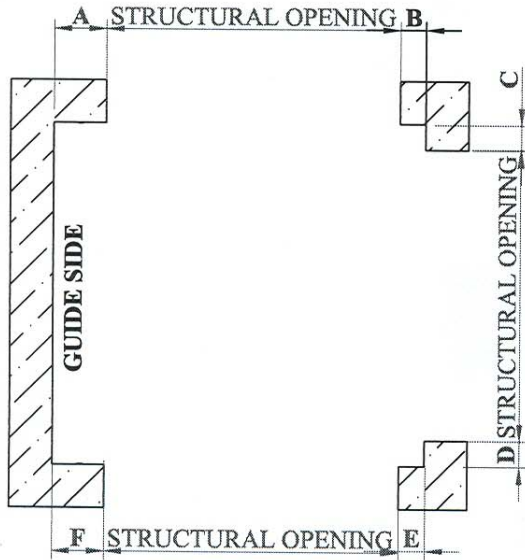

The return/nib dimensions shown are with the lift structure positioned centrally within the standard lift shaft dimensions. The position of the lift structure is dependant on the plumbness of the lift shaft provided.

The structural opening heights and widths shown are finished dimensions.

STRUCTURAL OPENING HEIGHTS

50kg Range	= 910mm
100A	= 1110mm
100B	= 1310mm

MODEL	STRUCTURAL OPENING WIDTH	A	B	C	D	E	F
DD50	440mm	182mm	103mm	ENTRANCE NOT AVAILABLE ON THIS FACE		73mm	212mm
50A	440mm on narrow side 540mm on wide side	162mm	118mm	85mm	115mm	88mm	192mm
50B	540mm	140mm	120mm	115mm	145mm	90mm	170mm
50C	640mm	140mm	120mm	115mm	145mm	90mm	170mm
100A	740mm	140mm	120mm	115mm	145mm	90mm	170mm
100B	840mm	140mm	120mm	115mm	145mm	90mm	170mm

Title: **MICROLIFT STRUCTURAL OPENING DETAILS FOR RISE AND FALL SHUTTERS.**

Stannah Microlifts Ltd
Caxton Close, East Portway
Andover, Hants
SP10 3QN

Fax: 01264 333465
Tel: 01264 351922

Data Sheet No:

DS. 0007

Date: July 1999

Issue No: 1

