


# DATA SHEET

FINISHED HEIGHT OF MOTOR ROOM DOORS = 2000.

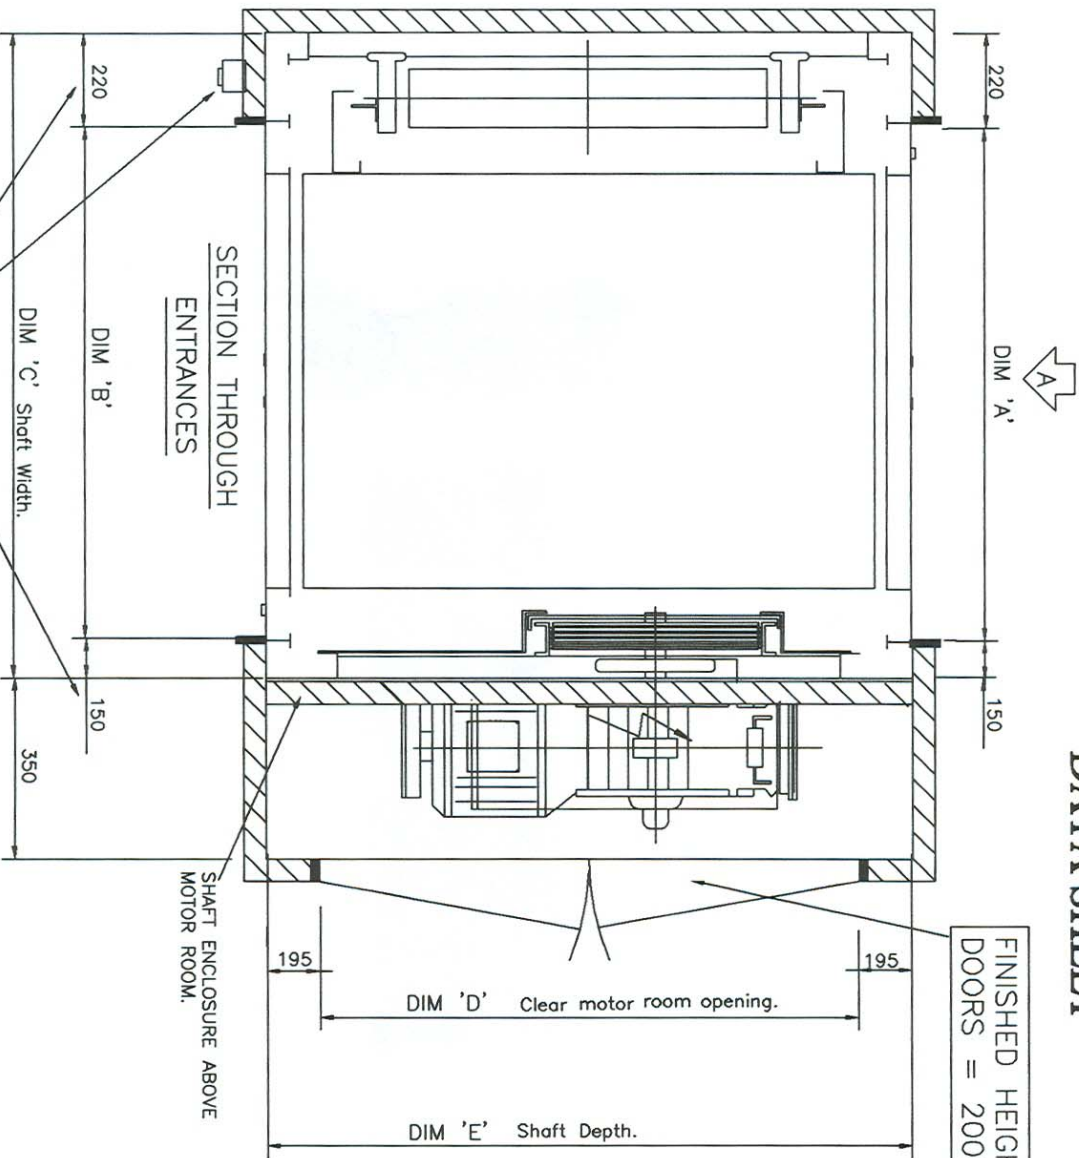

THESE DIMENSIONS WILL INCREASE BY 35MM & PUSH BUTTONS SURFACE MOUNTED, IF FIRE DOORS ARE REQUIRED.

Openings must be plumb & in line.

MODEL	DIMENSIONS				
	A	B	C	D	E
B	1280	1280	1650	1110	1500
EU	1580	1580	1950	1110	1500
D	1680	1680	2050	1310	1700
S	1280	1280	1650	1610	2000

## STRUCTURAL OPENING HEIGHTS

2000 HIGH DOORS = 2100 FROM F.F.L.  
 1800 HIGH DOORS = 1900 FROM F.F.L.  
 IF A PIT IS NOT PROVIDED THESE HEIGHTS WILL INCREASE BY THE HEIGHT OF THE RAMP UP TO THE DOOR CILL. IE 150 + 2100 = 2250 TO U/S OF LINTOL FROM F.F.L.

NOTE: IF FIRE DOORS ARE REQUIRED DIMENSIONS 'A' & 'B' WILL BE REDUCED BY 70MM AND THE PUSH BUTTONS WILL BE SURFACE MOUNTED IN SEPERATE BOXES ADJACENT TO THE LANDING DOORS.

Title: GOODSMASTER STRUCTURAL OPENINGS.

Stannah Microlifts Ltd  
 Caxton Close, Hants  
 SP10 3QN

Fax: 01264 333465  
 Tel: 01264 351922

Data Sheet No:

DS.0018

Date:

OCT 02

Issue No: 1

